

APP CRS	Rwy Ldg	6501
288°	TDZE	10
	Apt Elev	18

RNAV (RNP) Y RWY 29

NEWARK LIBERTY INTL (EWR)

RNP AR APCH. RF required.

T For uncompensated Baro-VNAV systems, procedure NA below -12°C or above 54°C. Caution, departing TEB Rwy 24 traffic climbing to 1500' MSL. Straight-In Rwy 29 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.


MISSED APPROACH: Climb to 2000 on track 288° to MUFIE and hold.

*Missed approach requires minimum climb of 417 feet per NM to 800.

D-ATIS
115.7 134.825



NEWARK APP CON
128.55 379.9NEWARK TOWER
118.3 257.6

GND CON
121.8

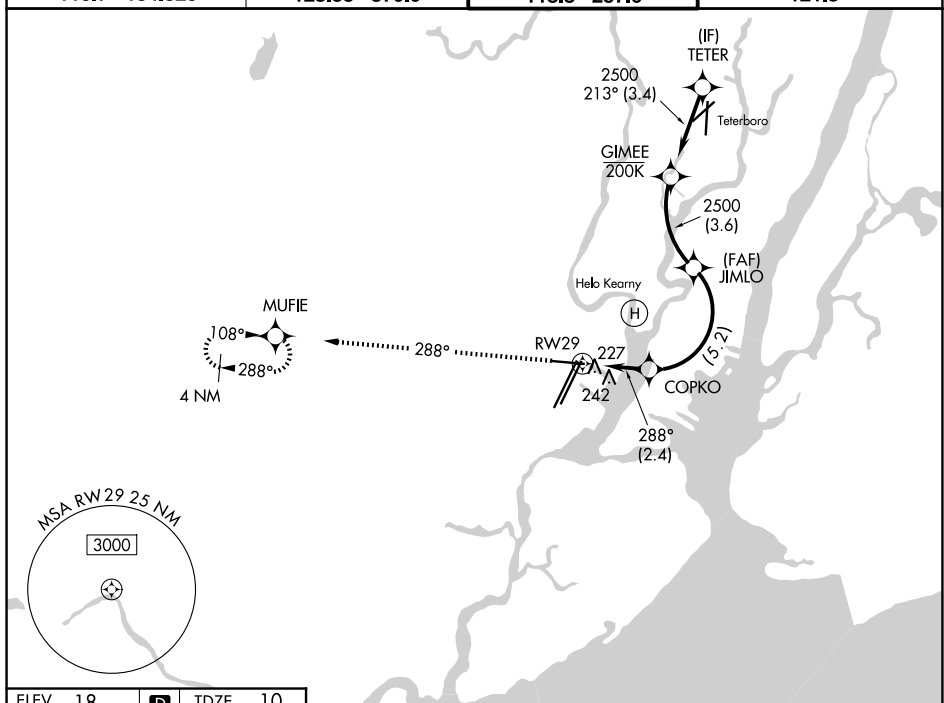

NE-2, 01 OCT 2026 to 29 OCT 2026

ELEV	18	D	TDZE	10
------	----	----------	------	----

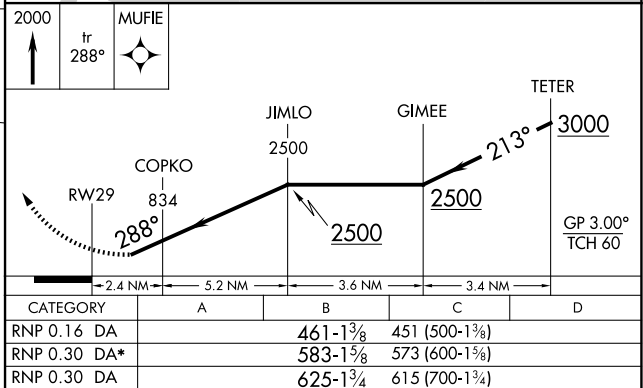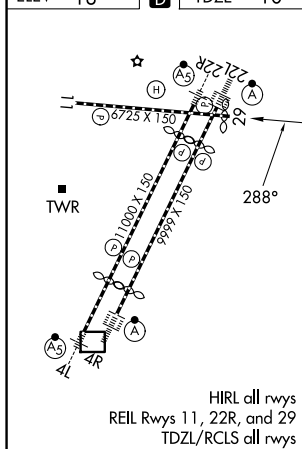

AUTHORIZATION REQUIRED

NEWARK, NEW JERSEY
Amdt 1F 22JAN26

40°42'N-74°10'W

NEWARK LIBERTY INTL (EWR)

RNAV (RNP) Y RWY 29