


LOC/DME I-GDI	APP CRS	Rwy Ldg	7002
108.5	134°	TDZE	12
Chan 22		Apt Elev	21

COPTER ILS or LOC RWY 13

LAGUARDIA (LGA)

RADAR required for procedure entry. DME or RADAR required.		MALSR	MISSED APPROACH: Climb to 800 then climbing left turn to 2000 on LGA VOR/DME R-043 to GREKO INT/LGA 5.7 DME and hold, continue climb-in-hold to 2000.
D-ATIS	NEW YORK APP CON	LAGUARDIA TOWER	GND CON
125.95	120.8 322.35	118.7 322.35	121.7 322.35

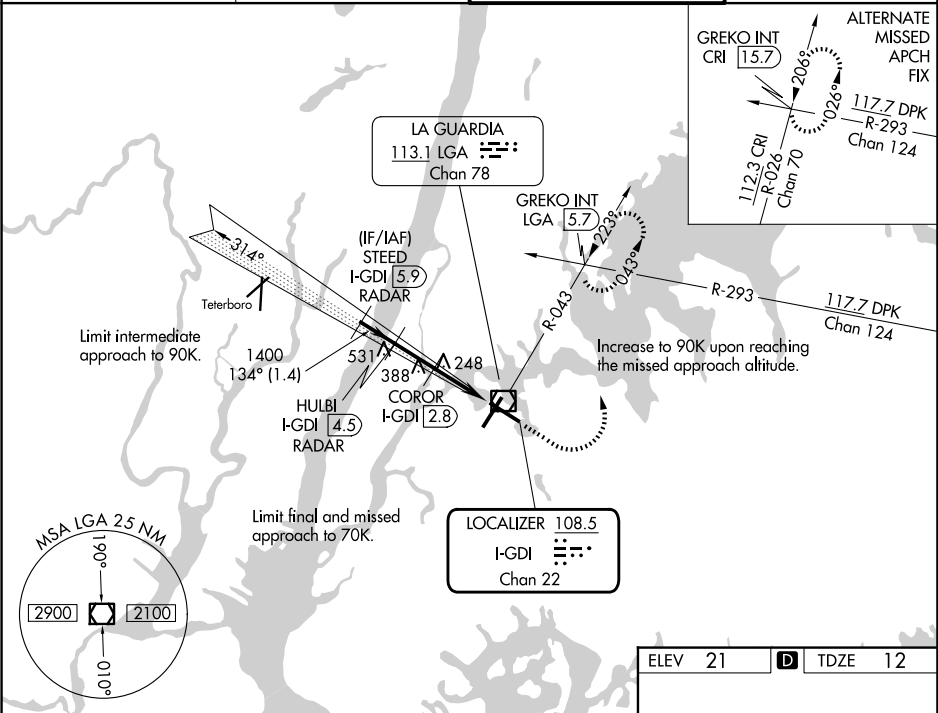

VGSI and ILS glidepath not coincident (VGSI Angle 3.10/TCH 55).		800	2000	GREKO INT
STEED I-GDI 5.9 RADAR		HULBI I-GDI 4.5 RADAR		
2500		1400		*LOC only.
13.4°		COROR I-GDI 2.8		*I-GDI 1.7
GS 3.10° HCH 49		1400		I-GDI 0.4
Intermediate descent gradient is 765 feet/NM.		*700		
1.4 NM		1.7 NM		1.1 NM
CATEGORY		COPTER		
H-ILS 13		212/12 200 (200-¼)		
H-LOC 13		700/12 688 (700-¼)		
COROR FIX MINIMUMS				
H-LOC 13		500/12 488 (500-¼)		

