RNAV (GPS) Y RWY 28L

OAKLAND SAN FRANCISCO BAY (OAK)


WAAS	APP CRS	Rwy Ldg	6213
CH 72700	278°	TDZE	9
W28A		Apt Elev	9


RNP APCH - GPS.


Rwy 28L helicopter visibility reduction below RVR 4000 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 2°C or above 54°C.

MISSED APPROACH: Climb to 4000 direct SOYOK and on track 285° to SAU VOR/DME and hold, continue climb-in-hold to 4000.

D-ATIS	NORCAL APP CON	OAKLAND TOWER	GND CON
133.775	125.35 263.15	118.3 291.65 (10L/R-28L/R, 15-33) 127.2 256.9 (12-30)	121.9 (10L/R-28L/R, 15-33) 121.75 (12-30)

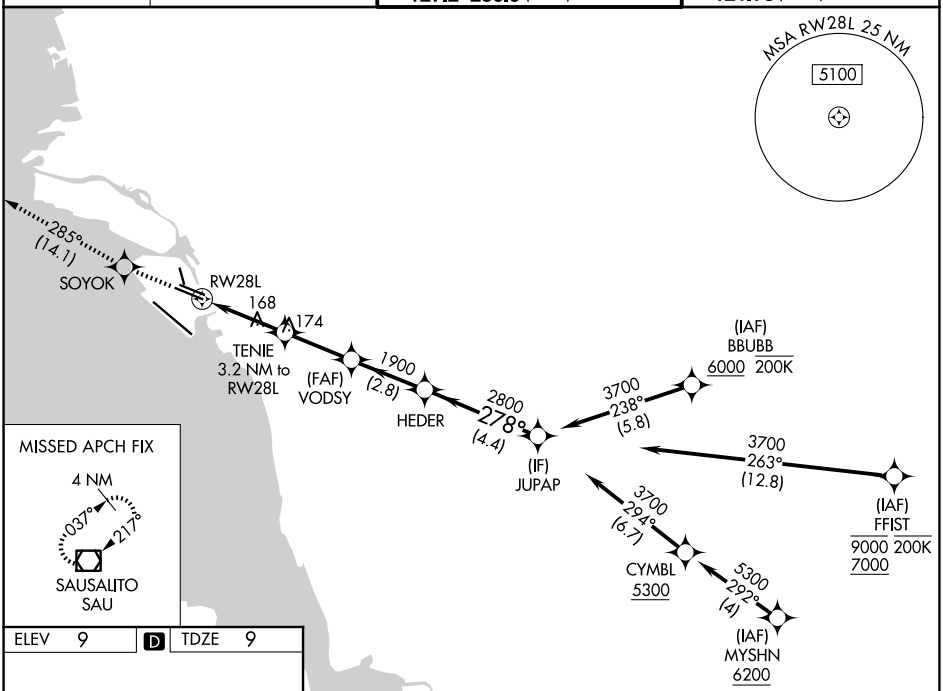

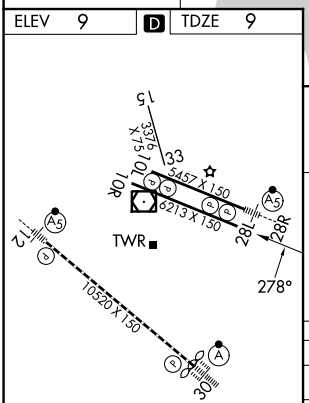

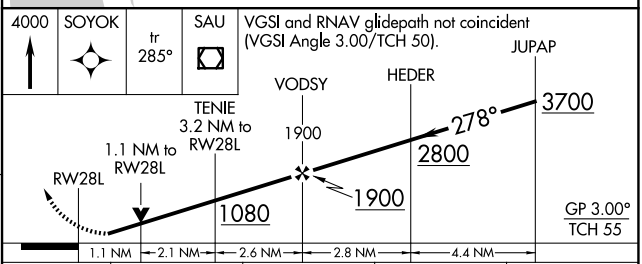

CATEGORY	A	B	C	D
LPV DA	259/40 250 (300-¾)			
LNAV/VNAV DA	387/55 378 (400-1)			
LNAV MDA	420/55 411 (500-1)		420/60 411 (500-1¼)	
CIRCLING	560-1 551 (600-1)		660-1¾ 651 (700-1¾)	1400-3 1391 (1400-3)

REIL Rwy 10R
TDZ/CL Rwy 30
MIRL Rwy 15-33
HIRL Rwys 12-30, 10L-28R, 10R-28L

SW-2, 01 OCT 2026 to 29 OCT 2026
SW-2, 01 OCT 2026 to 29 OCT 2026