
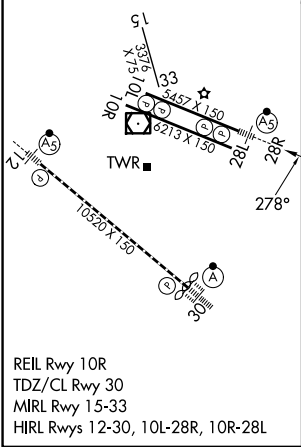


WAAS CH 42535 W28B	APP CRS 278°	Rwy Ldg TDZE Apt Elev	5457 7 9
--	------------------------	-----------------------------	-------------------------------------

RNAV (GPS) Y RWY 28R
OAKLAND SAN FRANCISCO BAY (OAK)

RNP APCH - GPS. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 2°C or above 54°C. For inop ALS, LNAV/VNAV all Cnts increase visibility to RVR 5500. ▲ *RVR 1800 authorized with use of FD or AP or HUD to DA.		MALSR 	MISSED APPROACH: Climb to 3000 direct ZERMO and on track 335° to REBAS and hold.
D-ATIS 133.775	NORCAL APP CON 125.35 263.15	OAKLAND TOWER 118.3 291.65 (10L/R-28L/R, 15-33) 127.2 256.9 (12-30)	GND CON 121.9 (10L/R-28L/R, 15-33) 121.75 (12-30)

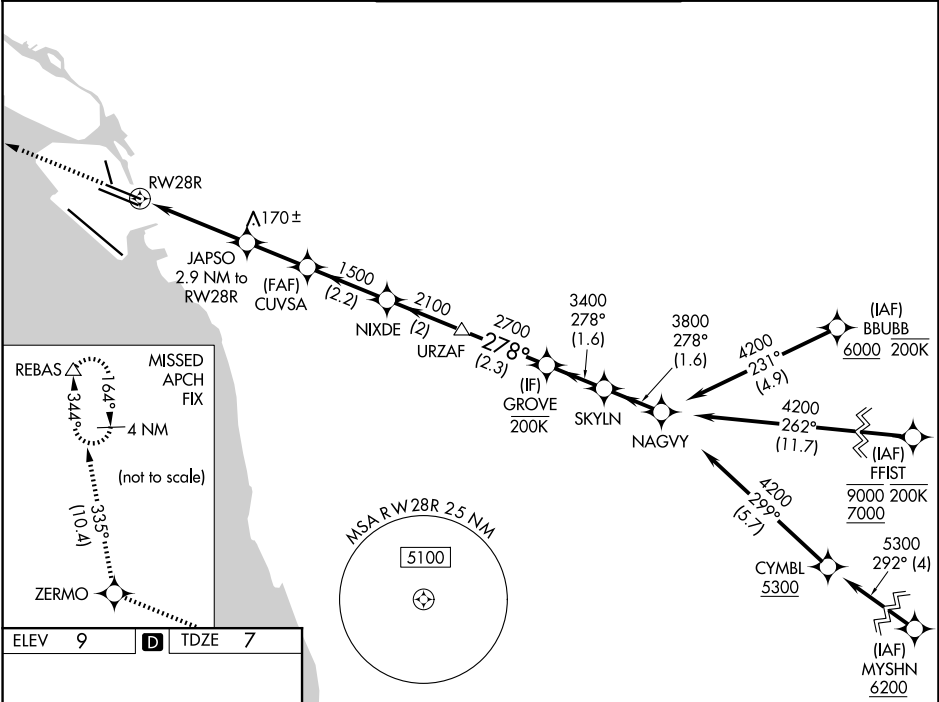

3000 ↑	ZERMO ✱	tr 335°	REBAS △							
				JAPSO 2.9 NM to RW28R	CUVSA 1500	NIXDE	URZAF	GROVE	SKYLN	NAGVY
				1.2 NM	1.7 NM	1.6 NM	2.2 NM	2 NM	2.3 NM	1.6 NM
				980	1500	2100	2700	3400	3800	4200
				GP 3.00° TCH 53						
CATEGORY		A		B		C		D		
LPV	DA*			207/24		200 (200-½)				
LNAV/ VNAV	DA			387/35		380 (400-¾)				
LNAV	MDA	440/24		433 (500-½)		440/40		433 (500-¾)		
CIRCLING		560-1		551 (600-1)		660-1¾ 651 (700-1¾)		1400-3 1391 (1400-3)		

SW-2, 01 OCT 2026 to 29 OCT 2026

SW-2, 01 OCT 2026 to 29 OCT 2026