
NORCAL DEP CON
120.9 323.2
D-ATIS
133.775
CLNC DEL
121.1
CPDLC
GND CON
121.9 (Rwys 28L/R)
OAKLAND TOWER
118.3 291.65 (Rwys 28L/R)

TOP ALTITUDE: ASSIGNED BY ATC

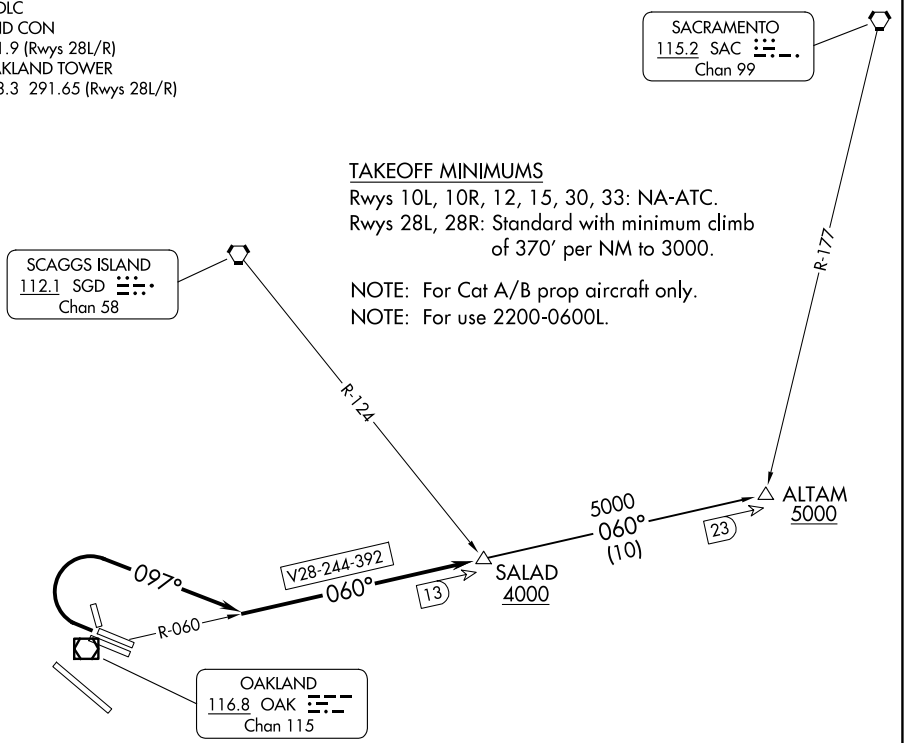

TAKEOFF MINIMUMS
Rwys 10L, 10R, 12, 15, 30, 33: NA-ATC.
Rwys 28L, 28R: Standard with minimum climb of 370' per NM to 3000.

NOTE: For Cat A/B prop aircraft only.
NOTE: For use 2200-0600L.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 28 L/R: Climbing right turn heading 097° to intercept OAK VOR/DME R-060 to cross SALAD/OAK 13 DME at or above 4000, thence . . . .

. . . . on ALTAM transition. Maintain ATC assigned altitude. Expect filed altitude 10 minutes after departure.

ALTAM TRANSITION (SALAD5.ALTAM): From over SALAD on OAK R-060 to ALTAM.

SW-2, 01 OCT 2026 to 29 OCT 2026
SW-2, 01 OCT 2026 to 29 OCT 2026