

LOC/DME I-MYY 108.75 Chan 24 (Y)	APP CRS 171°	Rwy Ldg TDZE 11 Apt Elev 36
--	------------------------	---

ILS Z or LOC RWY 17
PHILADELPHIA INTL (PHL)

DME or RADAR required.



⚠

Inop table does not apply to S-ILS 17 all Cats. Rwy 17 helicopter visibility reduction below RVR 4000 NA. For inop ALS, increase S-LOC 17 Cat A visibility to RVR 5500, Cat B visibility to 1¼ SM, and Cat C/D visibility to 2 SM. HOOCH fix minimums: Increase S-LOC 17 Cat A/B visibility to RVR 5500 and Cat C/D visibility to 1¾ SM. Circling NA to Rwy 8.

MALSF

MISSED APPROACH: Climb to 2000 then climbing right turn to 3000 direct OOD VORTAC and hold.

D-ATIS 133.4	PHILADELPHIA APP CON 124.35 319.15	PHILADELPHIA TOWER 118.5 327.05 (08/26, 09L/27R, 17/35) 135.1 327.05 (09R/27L)	GND CON 121.9 348.6
------------------------	--	--	-------------------------------

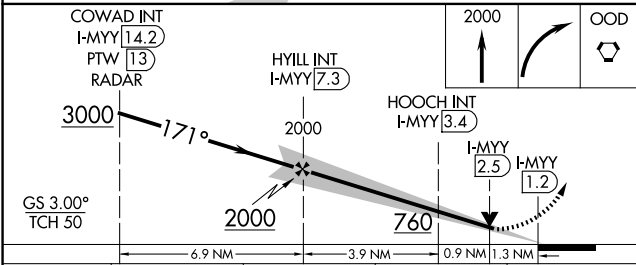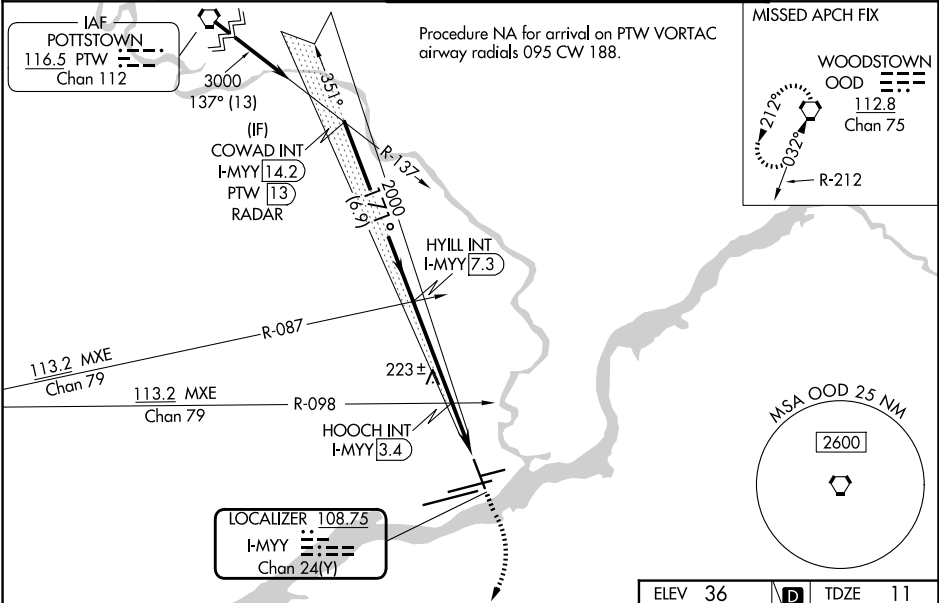

ELEV 36	D	TDZE 11
TDZ/CL Rwy 9R HIRL all Rwys REIL Rwys 9L and 35		
FAF to MAP 6.1 NM		
Knots	60	90 120 150 180
Min:Sec	6:06	4:04 3:03 2:26 2:02

CATEGORY	A	B	C	D
S-ILS 17	261/40 250 (300-¾)			
S-LOC 17	760/40 749 (800-¾)	760/55 749 (800-1)	760-1⅞ 749 (800-1⅞)	
CIRCLING	760-1 724 (800-1)	760-1¼ 724 (800-1¼)	760-2 724 (800-2)	760-2¼ 724 (800-2¼)
HOOCH FIX MINIMUMS				
S-LOC 17	480/40 540-1	469 (500-¾) 600-1	480/60 620-1½	469 (500-1¼) 720-2¼
CIRCLING	504 (600-1)	564 (600-1)	584 (600-1½)	684 (700-2¼)

NE-4, 01 OCT 2026 to 29 OCT 2026

NE-4, 01 OCT 2026 to 29 OCT 2026