


WAAS CH 86611 W08A	APP CRS 078°	Rwy Ldg 10591 TDZE 1118 Apt Elev 1135
--	------------------------	--


RNAV (GPS) Y RWY 8

PHOENIX SKY HARBOR INTL (PHX)

RNP APCH - GPS.		MALSF		MISSED APPROACH: Climb to 3000 then climbing left turn to 5000 direct AVENT and hold.
▼ ▲ Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Inop table does not apply to LPV all Cats. For inop ALS, increase LNAV Cats C and D visibility to 2 SM.	A3			
D-ATIS 127.575	PHOENIX APP CON 128.65 353.9	PHOENIX TOWER 118.7 278.8 (8-26) 120.9 254.3 (7L-25R, 7R-25L)	GND CON 119.75 269.2 (N) 132.55 269.2 (S)	

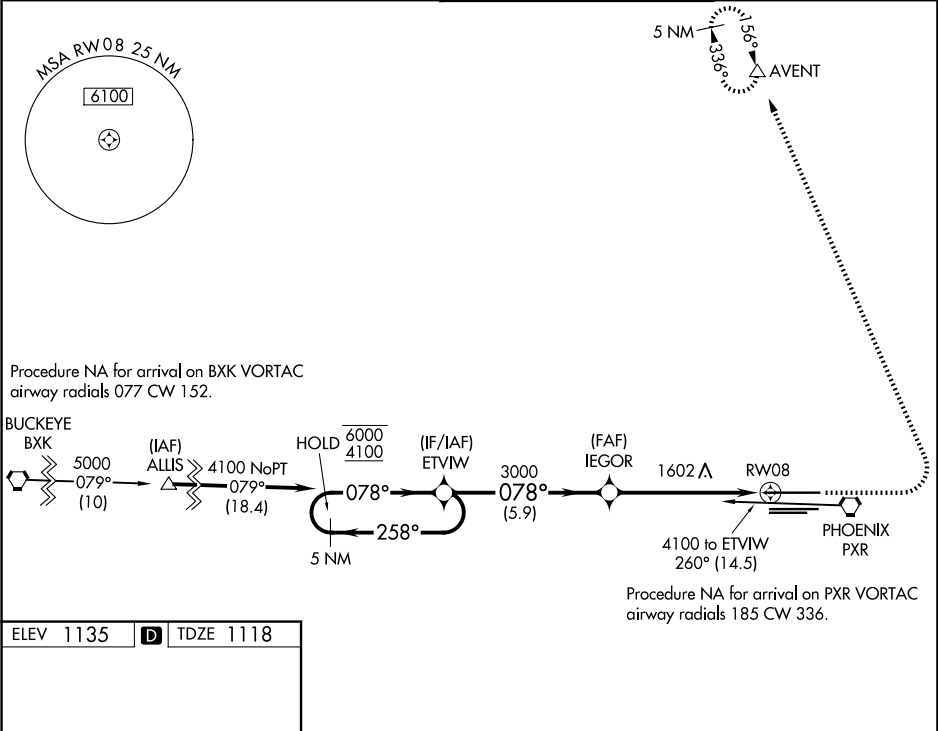

ELEV 1135	D	TDZE 1118
-----------	----------	-----------

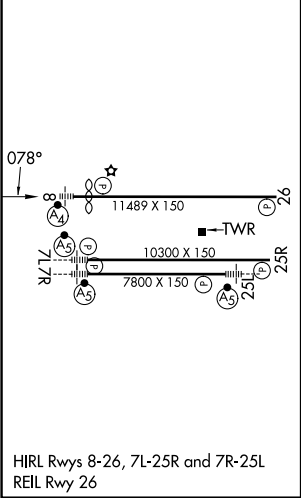

5 NM Holding Pattern 6000 ← 258° 4100 → 078° GP 3.00° TCH 54				ETVIW VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 69).				3000 5000 AVENT	
IEGOR 3000 078° 3000				2.1 NM to RW08 RW08					
5.9 NM 3.6 NM 2.1									
CATEGORY		A		B		C		D	
LPV DA		1368-¾ 250 (300-¾)							
LNAV MDA		1860-¾ 742 (800-¾)		1860-1 742 (800-1)		1860-1⅞ 742 (800-1⅞)			
CIRCLING		1860-1 725 (800-1)		1860-1¼ 725 (800-1¼)		2040-2¾ 905 (1000-2¾)		2340-3 1205 (1300-3)	