


WAAS CH 65623 W31A	APP CRS 313°	Rwy Ldg TDZE 1720 Apt Elev 1744
--	------------------------	---

RNAV (GPS) RWY 31

PIERRE RGNL (PIR)

RNP APCH. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM.	MALSR 	MISSED APPROACH: Climb to 4000 direct FASIP and hold.
---	-----------	---

ASOS 119.025	MINNEAPOLIS CENTER 125.1 269.1	CTAF 122.70	UNICOM 122.95
------------------------	--	-----------------------	-------------------------

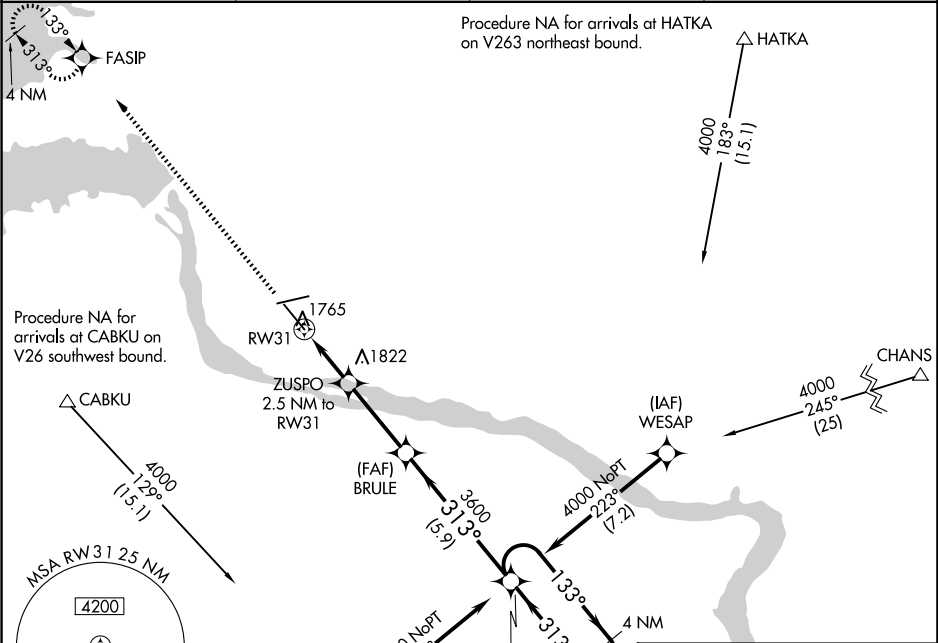

ELEV 1744		D		TDZE 1720	
*LNAV only		*1 NM to RW31			
RW31		2560*			
1 NM		1.5 NM		3.2 NM	
3.2 NM		5.9 NM		4 NM Holding Pattern	
CATEGORY		A		B	
LPV DA		1920-½		200 (200-½)	
LNAV/VNAV DA		1970-½		250 (300-½)	
LNAV MDA		2020-½		300 (300-½)	
CIRCLING		2240-1 496 (500-1)		2300-1 556 (600-1)	
		2400-1¾ 656 (700-1¾)		2460-2¼ 716 (800-2¼)	