

WAAS CH 60905 W28A	APP CRS 283°	Rwy Ldg 9290 TDZE 31 Apt Elev 31
--	------------------------	---

RNAV (GPS) X RWY 28R



PORTLAND INTL (PDX)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. DME/DME RNP-0.3 NA. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop ALS increase LNAV Cat C/D visibility to RVR 6000.

MALSR

MISSED APPROACH: Climb to 600 then climbing right turn to 4200 direct BTG VORTAC and hold, continue climb-in-hold to 4200.

D-ATIS 128.35 269.9	PORTLAND APP CON 124.35 299.2	PORTLAND TOWER 118.7 257.8 (10L-28R) 123.775 251.125 (3-21, 10R-28L)	GND CON 121.9 348.6
-------------------------------	---	--	-------------------------------

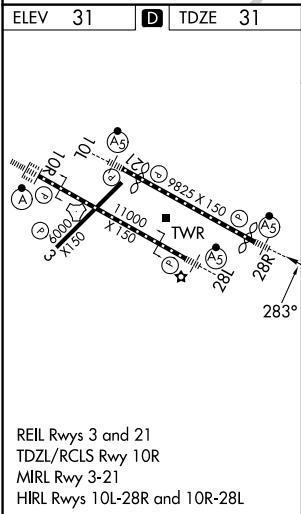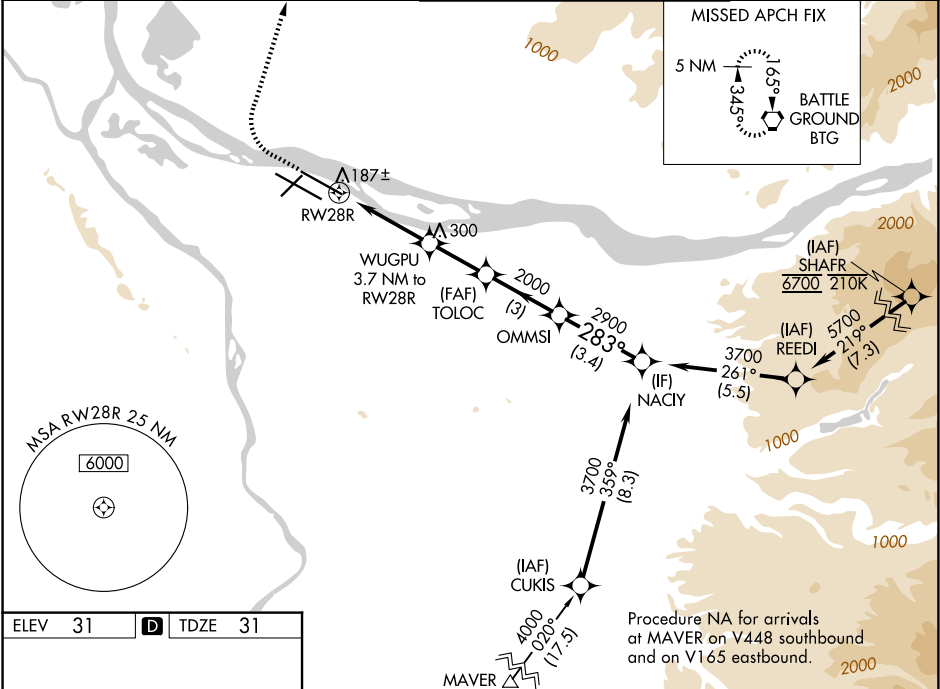

600	4200	BTG	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 70).			
*LNAV only		WUGPU 3.7 NM to RW28R	TOLOC	OMMSI	NACIY	
1.1 NM to RW28R		1260	2000	283°	3700	GP 3.00° TCH 54
1.1	2.6 NM	2.3 NM	3 NM	3.4 NM		
CATEGORY	A	B	C	D		
LPV DA	281/24		250 (300-½)			
LNAV/VNAV DA	446/45		415 (500-¾)			
LNAV MDA	440/24		409 (500-½)		440/40	409 (500-¾)
CIRCLING	720-1 689 (700-1)		760-1 729 (800-1)		1060-3	1029 (1100-3)

NW-1, 01 OCT 2026 to 29 OCT 2026

NW-1, 01 OCT 2026 to 29 OCT 2026