


NORCAL DEP CON
119.2 279.55
D-ATIS
135.8 363.0
CLNC DEL
124.9 370.85
GND CON
121.9 348.6
RENO TOWER
118.7 257.8

RNAV 1 - DME/DME/IRU or GPS.
RADAR required.

**TOP ALTITUDE:
ASSIGNED BY ATC**

TAKEOFF MINIMUMS

Rwy 8: NA- Terrain.
Rwy 17L: 600-2¼ with minimum climb of 437'/NM to 9000
or standard with minimum climb of 742'/NM to 9200.
Rwy 17R: Standard with minimum climb of 451'/NM to 9300.

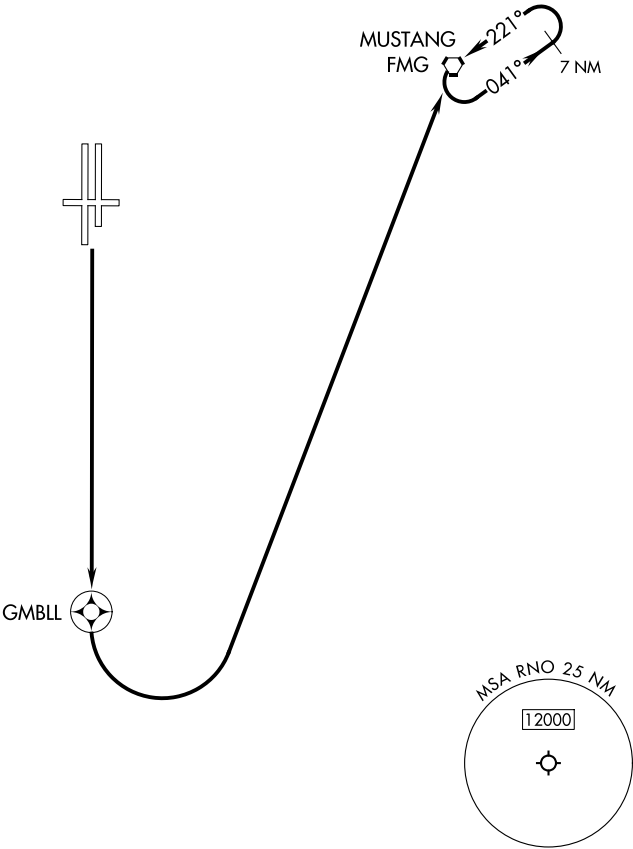

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 17L/R: Climb direct GMBLL, then climbing left turn direct FMG VORTAC, maintain ATC assigned altitude. Climb in FMG VORTAC holding pattern to depart FMG VORTAC at or above MEA/MCA for route of flight. Expect filed altitude 5 minutes after departure.