

APP CRS 167°	Rwy Ldg 10001 TDZE 4415 Apt Elev 4415
------------------------	--

RNAV (RNP) Z RWY 17R
RENO/TAHOE INTL (RNO)

RNP AR APCH - GPS. Authorization required. AGABY, HMWUD, LUCEK: RF. From AVVYY: min RNP 0.50, from WINRZ: min RNP 0.70, from ROWWS: min RNP 0.50, from DIDBE: min RNP 0.80, from GNAAR min RNP 0.50.


MALSR



MISSED APPROACH: Climb to 13000 on track 167° to ZAKBI and on track 183° to USINE and on track 127° to YARKU and hold, continue climb-in-hold to 13000. *Missed approach requires minimum climb of 267 feet per NM to 7200. # Missed approach requires minimum climb of 259 feet per NM to 7200.

 -13°C For uncompensated Baro-VNAV systems, procedure NA below -10°C or above 54°C. For inop ALS, increase RNP 0.30 DA visibility all Cats to 1 $\frac{1}{2}$ SM.

D-ATIS	NORCL APP CON	RENO TOWER	GND CON
135.8 363.0	119.2 279.55 126.3 353.9	118.7 257.8	121.9 348.6

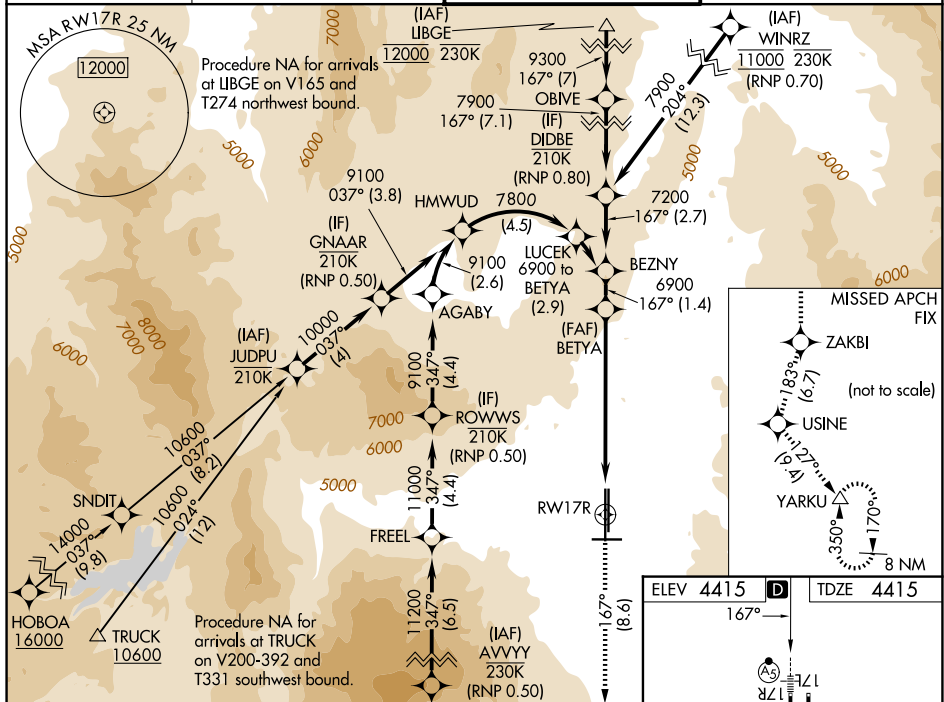

CATEGORY	A	B	C	D
RNP 0.10 DA *		4755/26	340 (400-½)	
RNP 0.17 DA #		4805/35	390 (400-¾)	
RNP 0.30 DA		5095-1½	680 (700-1½)	

