


APP CRS	Rwy Ldg	10011
347°	TDZE	4410
	Apt Elev	4415

RNAV (RNP) Z RWY 35L
RENO/TAHOE INTL (RNO)

RNP AR APCH - GPS, min RNP 0.30. Authorization required.	MALSR	MISSED APPROACH: Climb to 11000 on track 347° to TAKLE and hold, continue climb-in-hold to 11000. # Missed approach requires minimum climb of 216 feet per NM to 7200. *Missed approach requires minimum climb of 301 feet per NM to 7200.
For uncompensated Baro-VNAV systems, procedure NA below -10°C or above 35°C.		

D-ATIS 135.8 363.0	NORCL APP CON 119.2 279.55 126.3 353.9	RENO TOWER 118.7 257.8	GND CON 121.9 348.6
-----------------------	--	---------------------------	------------------------

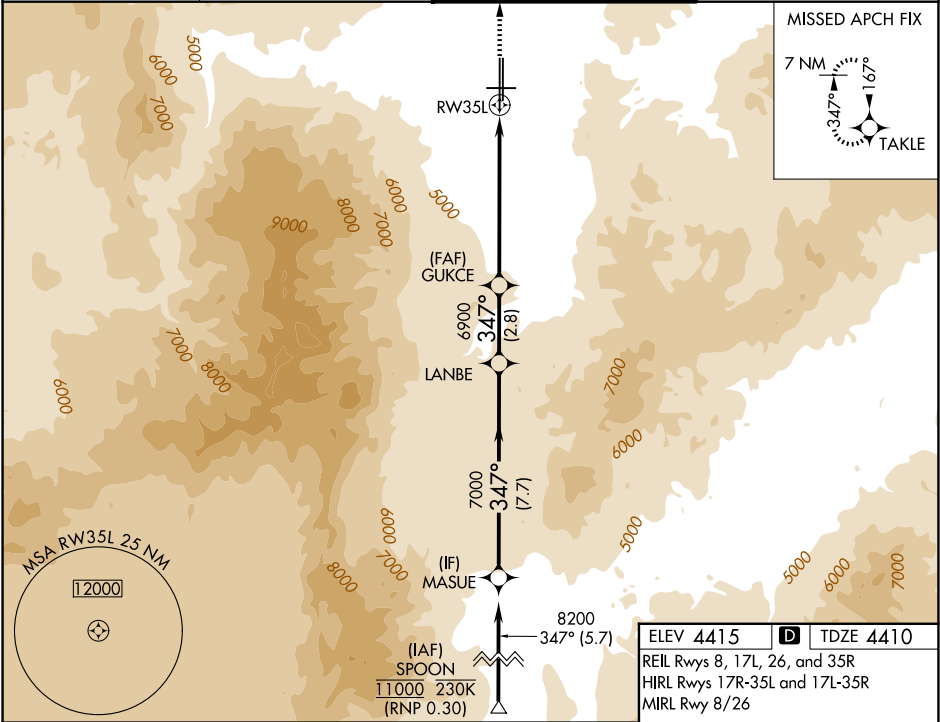

MASUE	8200	347°	LANBE	7000	GUKCE	6900	RW35L
GP 3.50° TCH 72	7.7 NM		2.8 NM		6.5 NM		
CATEGORY	A	B	C	D			
RNP 0.10 DA *		4753-5/8	343 (400-5/8)				
RNP 0.20 DA #		5193-13/4	783 (800-13/4)				
RNP 0.30 DA		5353-2	943 (1000-2)				
AUTHORIZATION REQUIRED							

ELEV 4415	TDZE 4410
REIL Rwy 8, 17L, 26, and 35R	
HIRL Rwy 17R-35L and 17L-35R	
MIRL Rwy 8/26	

