


LOC I-RGJ <u>110.7</u>	APP CRS 157°	Rwy Ldg TDZE Apt Elev	9003 167 168
----------------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 16
RICHMOND INTL (RIC)

⚠ ⚠	For inop ALS, increase S-LOC 16 Cats C and D visibility to 2 SM. GORDD Fix Minimums: for inop ALS, increase S-LOC 16 Cats C and D visibility to 1½ SM. **RVR 1800 authorized with use of FD or AP or HUD to DA. # DME from RIC VORTAC.	MALSR 	MISSED APPROACH: Climb to 2000 direct HPW VORTAC and hold.
---------------------------------	---	---	--

ATIS		POTOMAC APP CON		RICHMOND TOWER		GND CON	
119.15	263.025	126.4	282.375 (001°-185°)	121.1	257.8	121.9	348.6
		126.75	307.2 (186°-360°)				

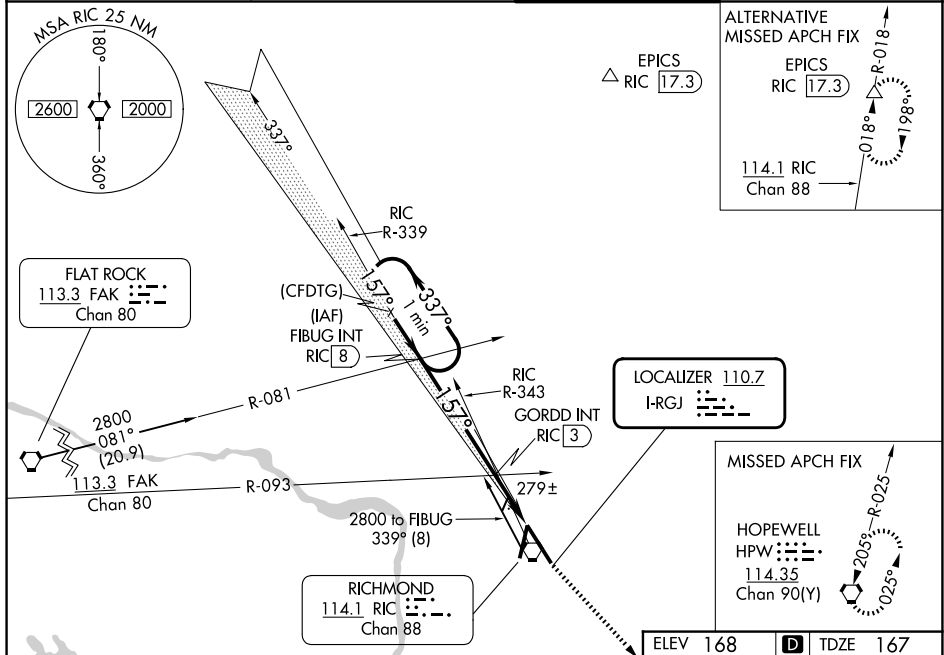

One Minute Holding Pattern

FIBUG INT RIC 8

2800 ← 337° → 2500

GS 3.00° TCH 54

VGS and ILS glidepath not coincident (VGS Angle 3.00/TCH 71).

2500

GORDD INT RIC 3

*LOC only. RIC 0.9

5 NM

2.1 NM

CATEGORY	A	B	C	D
S-ILS 16 **		367/24	200 (200-½)	
S-LOC 16	920/24 753 (800-½)	920/40 753 (800-¾)	920-1¾	753 (800-1¾)
CIRCLING	920-1 752 (800-1)	920-1¼ 752 (800-1¼)	920-2½	752 (800-2½)

GORDD FIX MINIMUMS #	
S-LOC 16	580/24 413 (500-½)
CIRCLING	660-1 492 (500-1)

GORDD FIX MINIMUMS #	
S-LOC 16	580/40 413 (500-¾)
CIRCLING	700-1½ 532 (600-1½)
	720-2 552 (600-2)

TDZ/CL Rwy 34					
HIRL Rwy 2-20 and 16-34					
REIL Rwy 20					
FAF to MAP 7.2 NM					
Knots	60	90	120	150	180
Min:Sec	7:12	4:48	3:36	2:53	2:22

NE-3, 01 OCT 2026 to 29 OCT 2026

NE-3, 01 OCT 2026 to 29 OCT 2026