



WAAS CH 70722 W34A	APP CRS 336°	Rwy Ldg TDZE Apt Elev	5810 1160 1175
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 34

ROANOKE/BLACKSBURG RGNL (WOODRUM FLD) (R.O.A)

RNP APCH.	MALSR 	MISSED APPROACH: (Do not exceed 240K until PROSE) Climb to 2800 then climbing right turn to 6000 direct PROSE and hold, continue climb-in-hold to 6000. # Missed approach requires minimum climb of 405 feet per NM to 3900.
  -12°C Circling NA northwest of Rwy 6-24. Rwy 34 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C or above 54°C. Inop table does not apply to LPV, LNAV/VNAV or LNAV Cat C/D. For inop ALS, increase LPV# all Cats visibility to 1 ½ SM.		

ATIS 132.375	ROANOKE APP CON 133.225 339.8	ROANOKE TOWER 118.3 257.8	GND CON 121.9 257.8
------------------------	---	-------------------------------------	-------------------------------

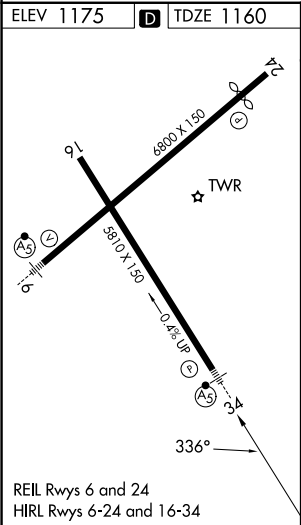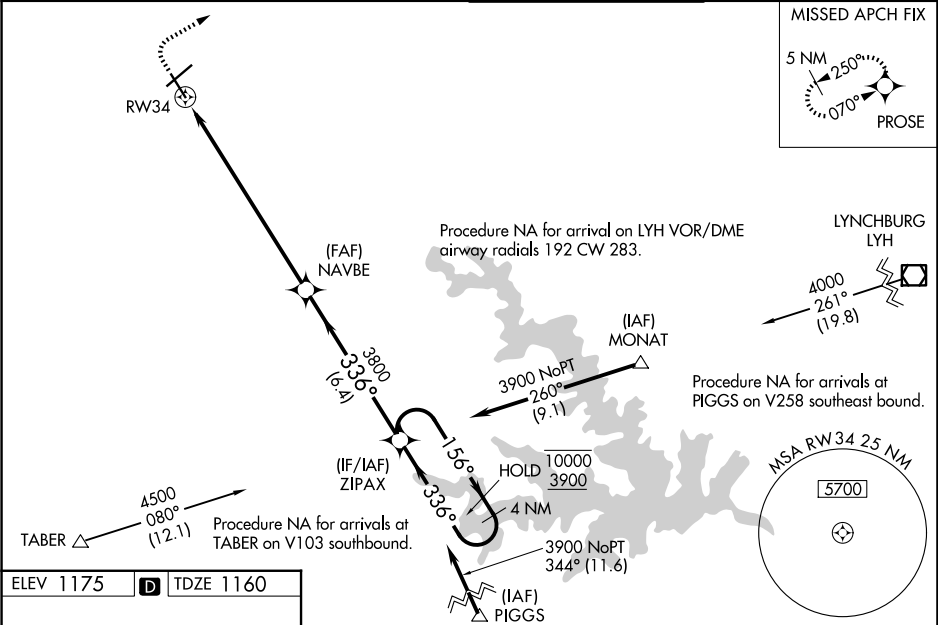

2800 6000 PROSE		4 NM Holding Pattern	
* LNAV only.		ZIPAX	
* 4.5 NM to RW34		NAVBE	
RW34		3800	
-4.5 NM		-3.7 NM	
-6.4 NM		ZIPAX	
CATEGORY		A	
LPV DA #		1560-3/4	
LPV DA		2568-5	
LNAV/VNAV DA		2300-4	
LNAV MDA		2640-3/4	
CIRCLING		2640-1	
		1465 (1500-3/4)	
		1480 (1500-1)	
		2640-3	
		1465 (1500-3)	
		1480 (1500-3)	
		2640-3	
		1465 (1500-3)	
		2820-3	
		1465 (1700-3)	