

WAAS
CH **45611**
W04A

APP CRS
044°

Rwy Ldg
TDZE
Apt Elev

8001
535
559

RNAV (GPS) RWY 4

FREDERICK DOUGLASS/GREATER ROCHESTER INTL (ROC)

RNP APCH - GPS.

ALSF-2

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct BILAW and hold.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. For inop ALS, increase LNAV Cats C/D visibility to 1 7/8 SM.

⚠


A

ATIS
124.825

ROCHESTER APP CON
119.55 269.6

ROCHESTER TOWER
118.3 254.3

GND CON
121.7

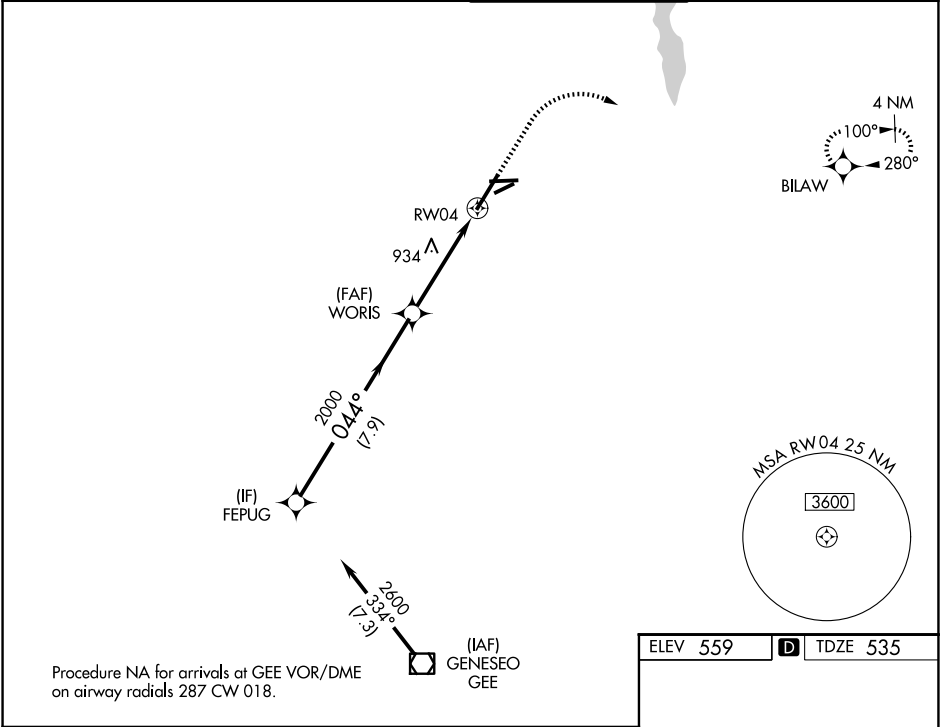

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).

1500

3000

BILAW

FEPUG

WORIS

RWY 04

GP 3.00° TCH 56

2600

2000

1.9 NM to RWY 04

7.9 NM

2.6 NM

1.9

CATEGORY	A	B	C	D
LPV DA		735/18	200 (200-1/2)	
LNAV/VNAV DA		1290-2 1/4	755 (800-2 1/4)	
LNAV MDA	1200/24	665 (700-1/2)	1200-1 1/2	665 (700-1 1/2)
CIRCLING	1200-1	641 (700-1)	1500-2 3/4 941 (1000-2 3/4)	1500-3 941 (1000-3)

AS 22

AS 28

AS 20

AS 10

AS 01

AS 02

AS 03

AS 04

AS 05

AS 06

AS 07

AS 08

AS 09

AS 10

AS 11

AS 12

AS 13

AS 14

AS 15

AS 16

AS 17

AS 18

AS 19

AS 20

AS 21

AS 22

AS 23

AS 24

AS 25

AS 26

AS 27

AS 28

AS 29

AS 30

AS 31

AS 32

AS 33

AS 34

AS 35

AS 36

AS 37

AS 38

AS 39

AS 40

AS 41

AS 42

AS 43

AS 44

AS 45

AS 46

AS 47

AS 48

AS 49

AS 50

AS 51

AS 52

AS 53

AS 54

AS 55

AS 56

AS 57

AS 58

AS 59

AS 60

AS 61

AS 62

AS 63

AS 64

AS 65

AS 66

AS 67

AS 68

AS 69

AS 70

AS 71

AS 72

AS 73

AS 74

AS 75

AS 76

AS 77

AS 78

AS 79

AS 80

AS 81

AS 82

AS 83

AS 84

AS 85

AS 86

AS 87

AS 88

AS 89

AS 90

AS 91

AS 92

AS 93

AS 94

AS 95

AS 96

AS 97

AS 98

AS 99

AS 100

TDZ/CL Rwy 4

REIL Rws 7, 10 and 25

MIRL Rwy 7-25

HIRL Rws 10-28 and 4-22