

WAAS CH 50202 W03A	APP CRS 035°	Rwy Ldg 13000 TDZE 3667 Apt Elev 3671
--	------------------------	--

RNAV (GPS) RWY 3
ROSWELL AIR CENTER (ROW)

RNP APCH - GPS.

▼


⚠

ASR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C.
When local altimeter setting not received, use ATS altimeter setting: increase LPV DA to 3997 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 4067 feet and all visibilities ½ SM; increase all MDAs 80 feet and LNAV visibility Cat C ¼ SM, LNAV visibility Cat D ½ SM, and Circling visibility Cats C/D ¼ SM. Baro-VNAV and VDP NA when using ATS altimeter setting.

MISSED APPROACH: Climb to 6000 direct AQZED and hold.

ATIS 128.45 306.2	ROSWELL APP CON ★ 119.6 239.0	ROSWELL TOWER ★ 118.5 (CTAF) 0 233.7	GND CON 121.9 348.6	UNICOM 122.95
-----------------------------	---	--	-------------------------------	-------------------------

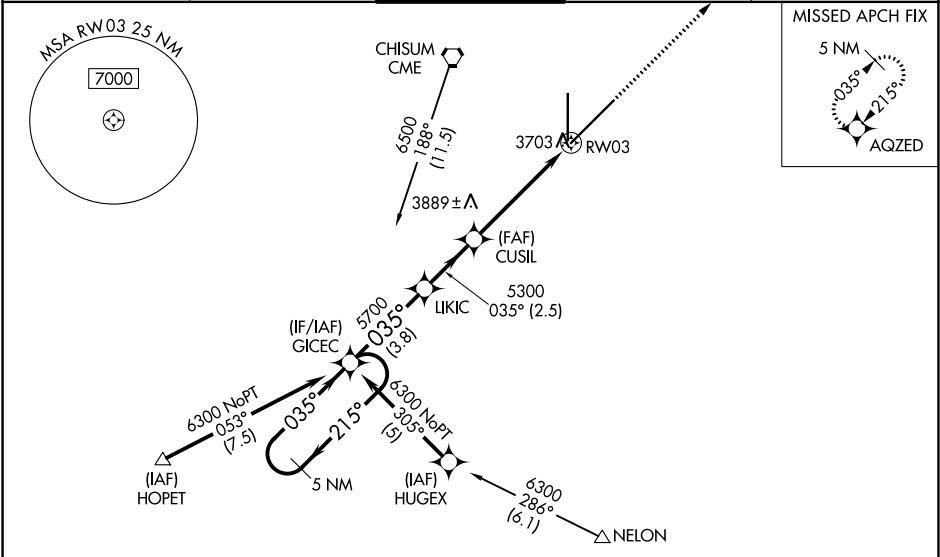

ELEV 3671 TDZE 3667

5 NM Holding Pattern

GP 3.00° TCH 50

6300

5700

5300

6000 AQZED

CATEGORY	A	B	C	D
LPV DA	3917-¾ 250 (300-¾)			
LNAV/VNAV DA	3987-1 320 (400-1)			
LNAV MDA	4140-1 473 (500-1)	4140-1⅜ 473 (500-1⅜)	4140-1½ 473 (500-1½)	
CIRCLING	4140-1 469 (500-1)	4140-1½ 469 (500-1½)	4300-2 629 (700-2)	

001 X 8000

35

035°

MIRL Rwy 3-21

MIRL Rwy 17-35

SW-1, 01 OCT 2026 to 29 OCT 2026

SW-1, 01 OCT 2026 to 29 OCT 2026