


WAAS CH 62810 W02A	APP CRS 019°	Rwy Ldg 5503 TDZE 21 Apt Elev 24
--	------------------------	---

RNAV (GPS) RWY 2

SACRAMENTO EXEC (SAC)

RNP APCH-GPS. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 7⁄8 SM, increase LNAV all Cats visibility to 1 SM. ▲		MALSR 	MISSED APPROACH: Climb to 440 then climbing left turn to 2000 direct JIRAG and hold.	
ATIS 118.075	NORCAL APP CON 125.25 257.9	EXEC TOWER ★ 119.5 (CTAF) 0 278.8	GND CON 125.0	UNICOM 122.95

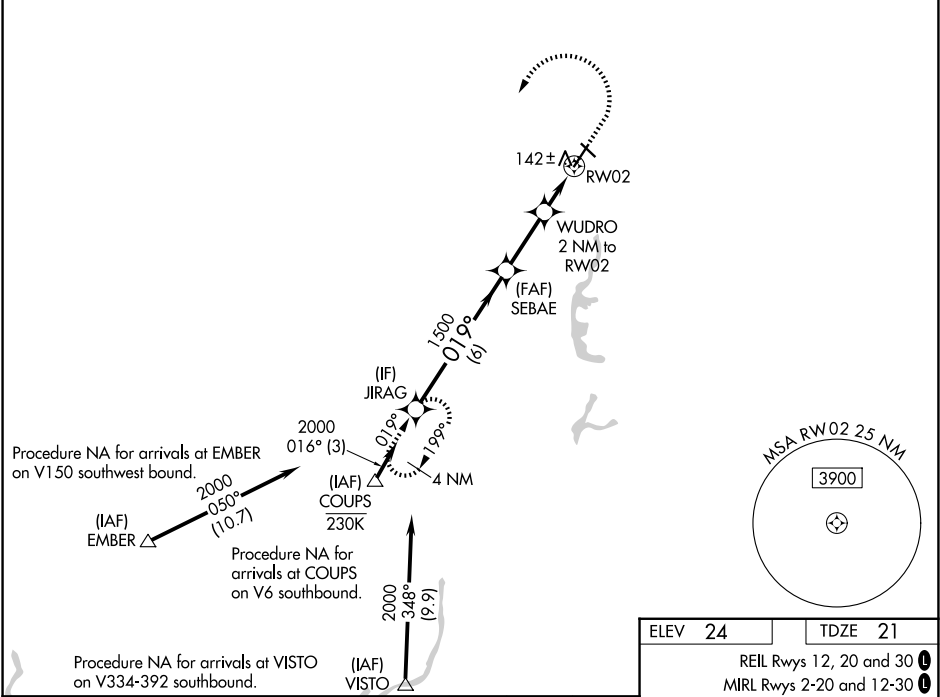

JIRAG		440	2000	JIRAG
2000		1500	700	1500
GP 3.00° TCH 57		WUDRO 2 NM to RW02	1 NM to RW02	RW02
6 NM		2.5 NM	1 NM	1 NM
CATEGORY	A	B	C	D
LPV DA	221-1⁄2		200 (200-1⁄2)	
LNAV/VNAV DA	304-1⁄2		283 (300-1⁄2)	
LNAV MDA	400-1⁄2 379 (400-1⁄2)		400-5⁄8 379 (400-5⁄8)	
CIRCLING	500-1 476 (500-1)	520-1 496 (500-1)	560-1 1⁄2 536 (600-1 1⁄2)	800-2 1⁄2 776 (800-2 1⁄2)

