

ST. JOSEPH, MISSOURI

AL-359 (FAA)

25275


WAAS CH 77819 W35A	APP CRS 356°	Rwy Ldg 8061 TDZE 815 Apt Elev 827
--	------------------------	---

RNAV (GPS) RWY 35
ROSECRANS MEML (STJ)


	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F), DME/DME RNP-0.3 NA, VDP and Baro-VNAV NA when using Kansas City Intl altimeter setting. When local altimeter setting not received, use Kansas City Intl altimeter setting and increase all DA 97 feet and increase LPV all Cts visibility to RVR 5000, and LNAV/VNAV all Cts visibility to 1 1/4 mile; increase all MDA 100 feet, and increase LNAV Cat C/D/E visibility 1/4 mile, and Circling Cat C 1/2 mile, Cat D 1/4 mile.
ASR/PAR	

MISSED APPROACH:
Climb to 3000 direct
TOCDU and hold.

ATIS 125.05	ST. JOSEPH APP CON ★ 120.35 360.8	ST. JOSEPH TOWER ★ 126.9(CTAF) 0 239.0	GND CON 121.9	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

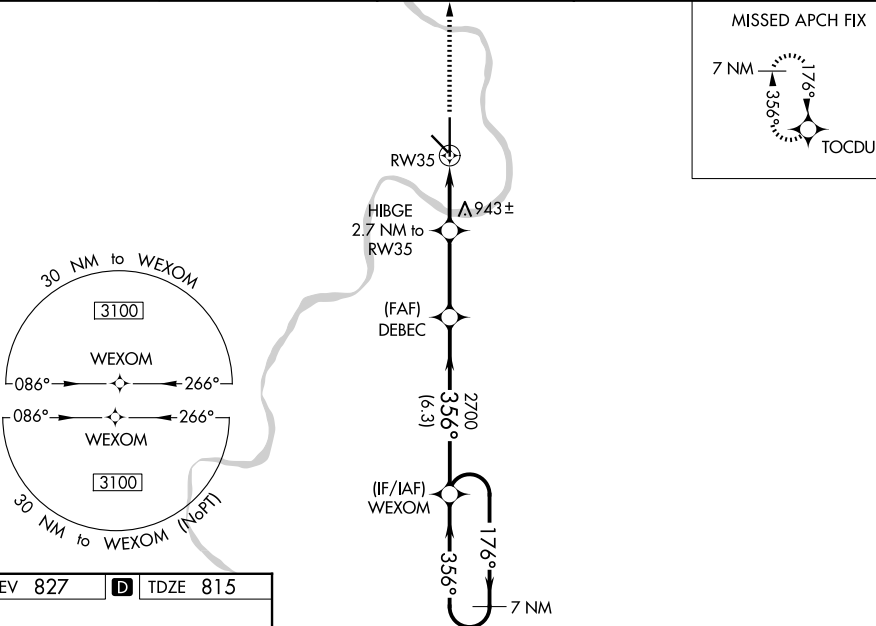

ELEV 827	D	TDZE 815
----------	----------	----------

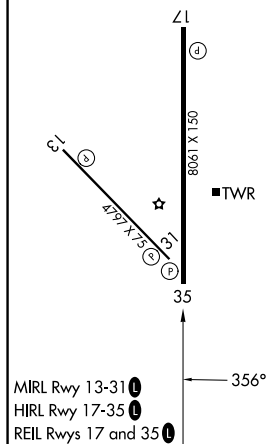

CATEGORY	A	B	C	D	E
LPV DA	1015/40 200 (200-¾)				
LNAV/ VNAV DA	1096/45 281 (300-¾)				
LNAV MDA	1200/55	385 (400-1)	1200/60 385 (400-1¼)		
CIRCLING	1400-1 573 (600-1)	1420-1 593 (600-1)	1620-2¼ 793 (800-2¼)	1640-2¾ 813 (900-2¾)	1760-3 933 (1000-3)

ST. JOSEPH, MISSOURI
Amdt 2A 05MAR15

39°46'N-94°55'W

ROSECRANS MEML (ST.J)

RNAV (GPS) RWY 35

NC-3, 01 OCT 2026 to 29 OCT 2026