


ST. LOUIS DEP CON
128.1 307.05
D-ATIS
125.025 379.925
CLNC DEL
119.5 363.1
CPDLC
GND CON
121.9 348.6 (Inbound)
121.65 377.175 (Outbound)
118.925 227.125 (11/29)
ST. LOUIS TOWER
120.05 284.6 (12L/30R, 24)
118.5 257.7 (12R/30L)
132.475 239.275 (6, 11/29)

DME and RADAR required.

TOP ALTITUDE:
ASSIGNED BY ATC

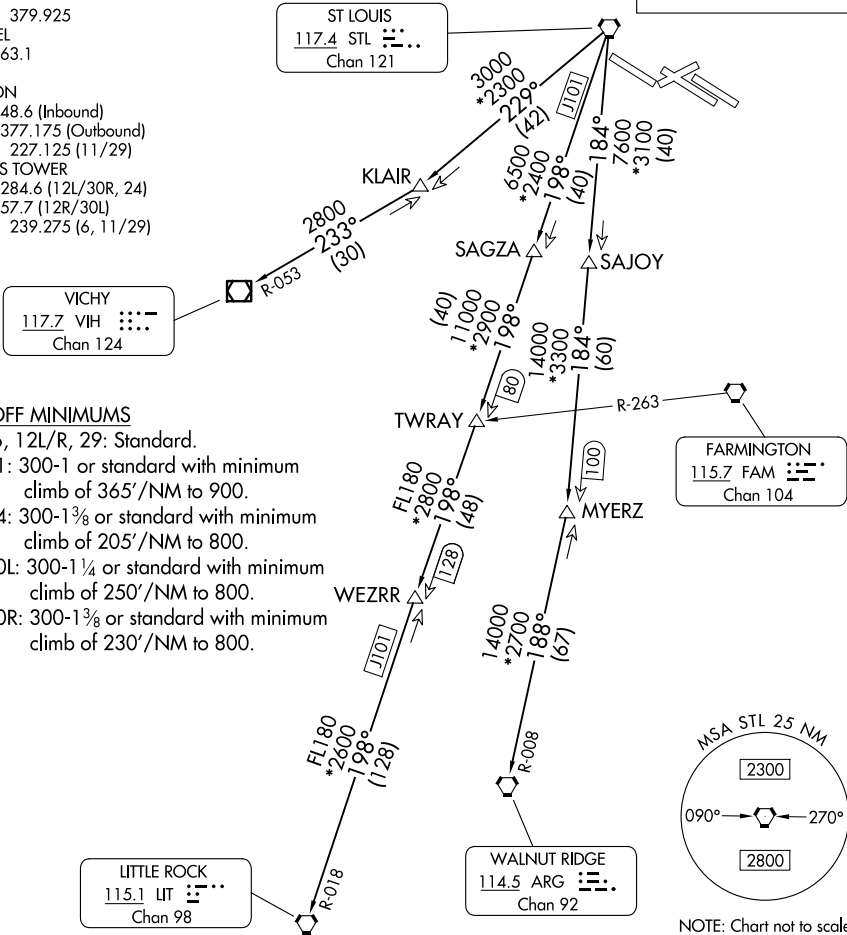

TAKEOFF MINIMUMS

- Rwys 6, 12L/R, 29: Standard.
Rwy 11: 300-1 or standard with minimum climb of 365'/NM to 900.
Rwy 24: 300-1 3/8 or standard with minimum climb of 205'/NM to 800.
Rwy 30L: 300-1 1/4 or standard with minimum climb of 250'/NM to 800.
Rwy 30R: 300-1 3/8 or standard with minimum climb of 230'/NM to 800.

DEPARTURE ROUTE DESCRIPTION

- TAKEOFF ALL RUNWAYS: Climb on assigned heading for RADAR vectors to appropriate route, maintain ATC assigned altitude and expect filed altitude 10 minutes after departure.
- LITTLE ROCK TRANSITION (LINDY9.LIT): From over STL VORTAC on STL R-198 and LIT R-018 to LIT VORTAC.
- MYERZ TRANSITION (LINDY9.MYERZ): From over STL VORTAC on STL R-184 to MYERZ.
- VICHY TRANSITION (LINDY9.VIH): From over STL VORTAC on STL R-229 and VIH R-053 to VIH VOR/DME.
- WALNUT RIDGE TRANSITION (LINDY9.ARG): From over STL VORTAC on STL R-184 and ARG R-008 to ARG VORTAC.