
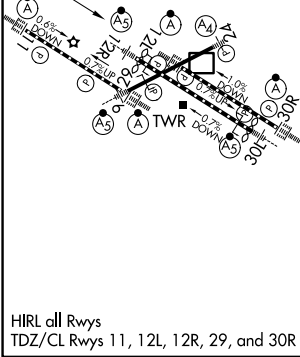


APP CRS	Rwy Ldg	8956
123°	TDZE	541
	Apt Elev	617

RNAV (RNP) Z RWY 12L

ST LOUIS LAMBERT INTL (STL)

RNP AR APCH - GPS. Authorization required from HRBEE or RRIPP: RF.			ALSF-2		MISSED APPROACH: Climb to 3000 direct ODITY and track 071° to TOY VORTAC and hold.	
RADAR required for procedure entry						
 Use of FD or AP required during simultaneous operations. Simultaneous approach authorized with Rwy 11, except for arrivals at RRIPP and HRBEE. For uncompensated Baro-VNAV systems, procedure NA below -16°C or above 54°C. For inop ALS, increase RNP 0.30 all Cnts visibility to 1 1/2 SM.						
D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 120.05 284.6	GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)		CLNC DEL 119.5 363.1	CPDLC

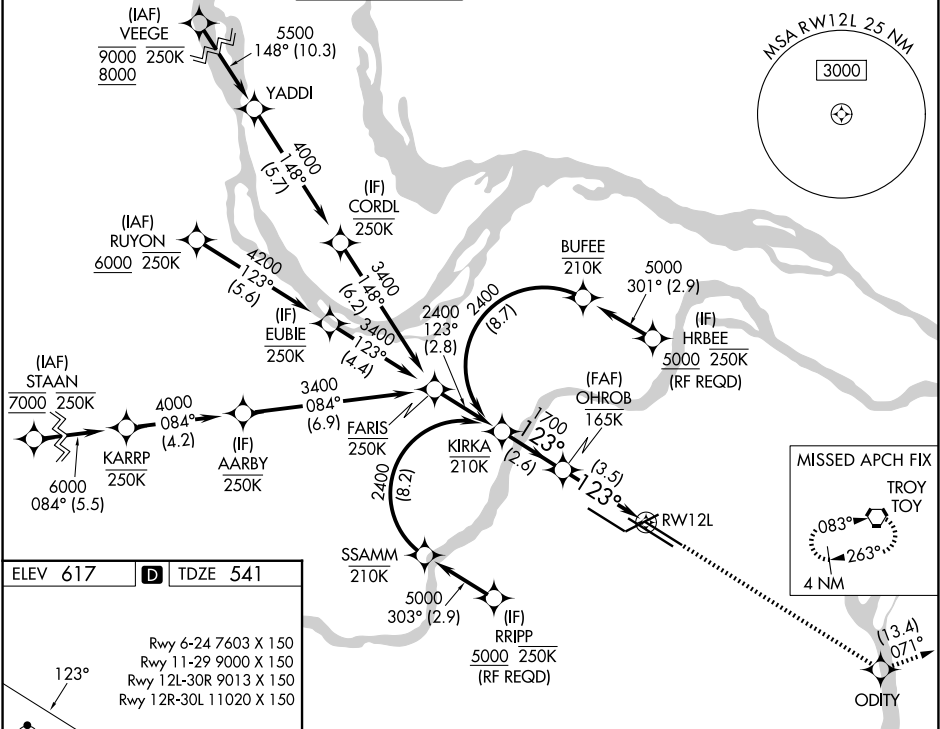

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 60).				3000 ↑	ODITY ✦	tr 071°	TOY ⬡
KIRKA	OHROB		See planview for multiple IF locations.				
2400	1700		RW12L				
GP 3.00° TCH 54	1700 ↗		↗				
2.6 NM		3.5 NM					
CATEGORY	A	B	C	D			
RNP 0.30 DA	1055/55 514 (500-1)						
AUTHORIZATION REQUIRED							

NC-3, 01 OCT 2026 to 29 OCT 2026

NC-3, 01 OCT 2026 to 29 OCT 2026