


26134

RNAV (GPS) Y RWY 12R  
ST LOUIS LAMBERT INTL (STL)


**V** Rwy 12R helicopter visibility reduction below RVR 4000 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Simultaneous approach authorized with Rwy 11. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to 1% SM, LNAV Cats A/B visibility to RVR 5500, and LNAV Cat C/D/E visibility to 1% SM.

**MISSED APPROACH:** Climb to 5000 direct FONTI and hold, continue climb-in-hold to 5000.

|                                  |                                           |                                       |                                                                                                               |
|----------------------------------|-------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------------------------------|
| D-ATIS<br><b>125.025 379.925</b> | ST. LOUIS APP CON<br><b>132.125 360.6</b> | ST. LOUIS TOWER<br><b>118.5 257.7</b> | GND CON<br><b>121.9 348.6</b> (Inbound)<br><b>121.65 377.175</b> (Outbound)<br><b>118.925 227.125</b> (11/29) |
|----------------------------------|-------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------------------------------|

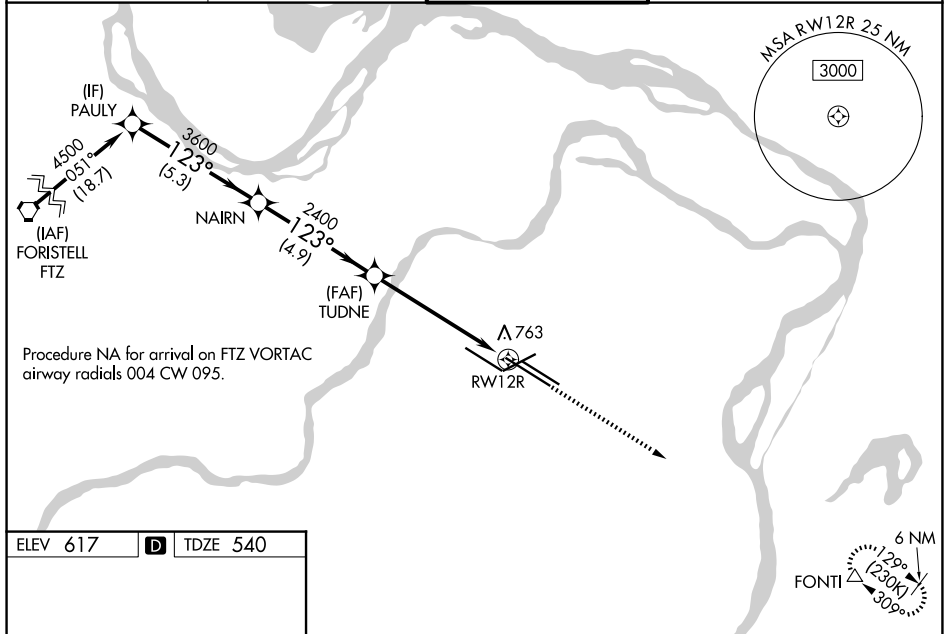

|          |          |          |
|----------|----------|----------|
| ELEV 617 | <b>D</b> | TDZE 540 |
|----------|----------|----------|

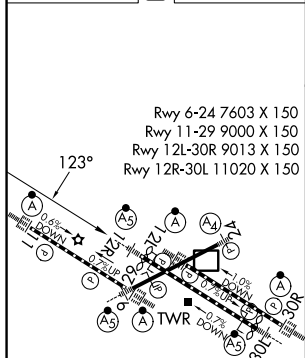

HIRL all rwys  
TDZL/RCLS Rwys 11, 12L, 12R,  
29, and 30R

VGSI and RNAV glidepath not coincident  
(VGSI Angle 3.00°/TCH 71°).

PAULY

4500

1.23°

3600

2400

5.3 NM

4.9 NM

4.4 NM

1.3 NM

1.3°

2400

1.3°

1.3 NM to RW12R

RW12R

GP 3.00°  
TCH 54

PAULY

NAIRN

TUDNE

5000

FONTI

△

| CATEGORY          | A                    | B | C                   | D | E |
|-------------------|----------------------|---|---------------------|---|---|
| LPV DA            | 740/18 200 (200-½)   |   |                     |   |   |
| LNNAV/<br>VNAV DA | 1103-1¼ 563 (500-1¼) |   |                     |   |   |
| LNNAV MDA         | 1020/40 480 (500-¾)  |   | 1020/50 480 (500-1) |   |   |

ST LOUIS LAMBERT INTL (STL)  
RNAV (GPS) Y RWY 12R

NC-3, 01 OCT 2026 to 29 OCT 2026