ILS or LOC RWY 17

SALT LAKE CITY INTL (SLC)

LOC/DME I-BNT	APP CRS	Rwy Ldg	9596
111.5	169°	TDZE	4222
Chan 52		Apt Elev	4231

RNP APCH-GPS. From WEBER or EKKHO.


DME or RADAR required. RADAR required for procedure entry at TUKTE.


Simultaneous approach authorized. For inop ALS, increase S-ILS 17 Cat E visibility to RVR 4000, increase S-LOC 17 Cat C/D/E visibility to 1⅜ SM.


MALSR (A5)

MISSED APPROACH: Climb to 10000 on FFU VORTAC R-342 to FFU VORTAC and hold.

D-ATIS	SALT LAKE CITY APP CON	SALT LAKE CITY TOWER	GND CON
124.75 125.625	125.7 284.6	118.3 257.8	121.9 348.6

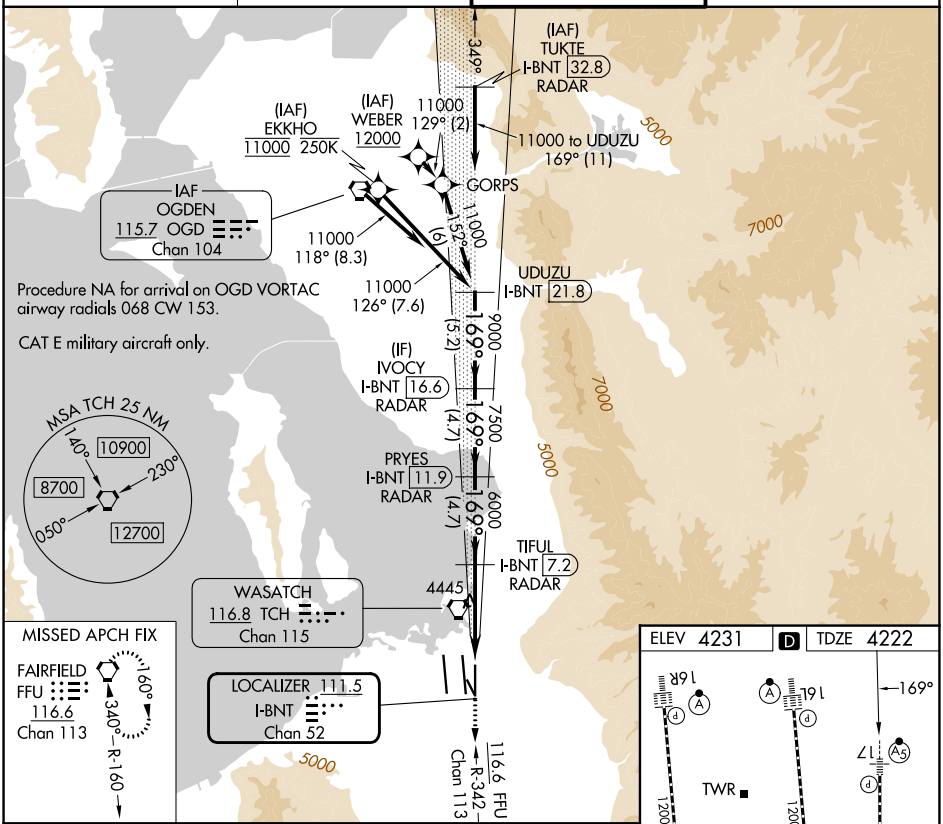

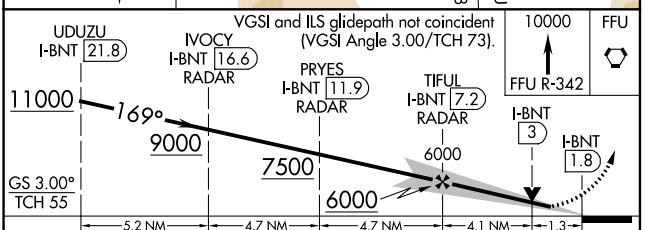

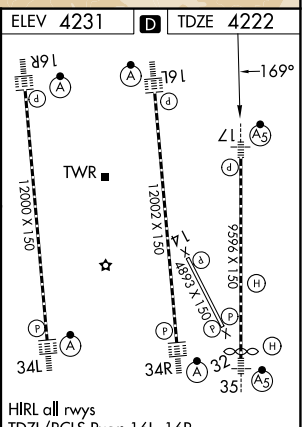

HIRL all rwys
TDZL/RCLS Rwys 16L, 16R, 17, 34L, 34R and 35

CATEGORY	A	B	C	D	E
S-ILS 17	4422/18 200 (200-½)				
S-LOC 17	4700/24 478 (500-½)		4700/50 478 (500-1)		

FAF to MAP 5.4 NM

Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48

SW-4, 01 OCT 2026 to 29 OCT 2026
SW-4, 01 OCT 2026 to 29 OCT 2026