

WAAS CH 77517 W03A	APP CRS 038°	Rwy Ldg TDZE 1917 Apt Elev 1919
--	------------------------	---

RNAV (GPS) RWY 3
SAN ANGELO RGNL/MATHIS FLD (SJT)

RNP APCH - GPS.

▼


▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C.
For inop ALS, increase LPV Cat E visibility to RVR 4000, and LNAV/VNAV Cat E and LNAV Cat E visibility to RVR 6000. Circling NA for Cat E west of Rwy 18-36.
RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR

MISSED APPROACH:
Climb to 3800 direct LITAZ and hold.

ATIS 128.45 319.0	SAN ANGELO APP CON ★ 125.35 354.1	MATHIS TOWER ★ 118.3(CTAF) 284.7	GND CON 121.9 348.6	UNICOM 122.95
-----------------------------	---	--	-------------------------------	-------------------------

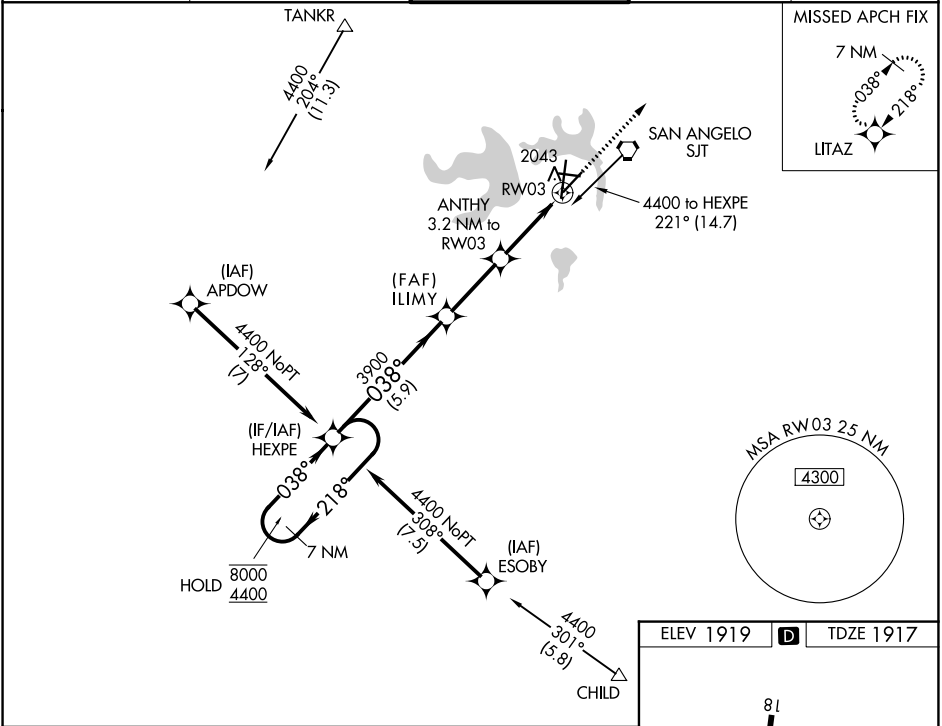

7 NM Holding Pattern					HEXPE		ILIMY		ANTHY		3800 LITAZ	
8000 → 218°					4400 → 038°		3900		3000		1 NM to RW03	
GP 3.00°					TCH 51		5.9 NM		2.8 NM		2.2 NM	
CATEGORY					A		B		C		D	
LPV DA #							2117/24		200 (200-½)			
LNAV/VNAV DA							2300/35		383 (400-⅝)			
LNAV MDA					2300/24		383 (400-⅝)		2300/35		383 (400-⅝)	
CIRCLING					2360-1		2380-1		2500-1½		2700-2½	
					441 (500-1)		461 (500-1)		581 (600-1½)		781 (800-2½)	

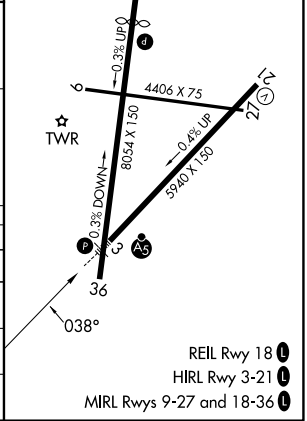

SC-3, 01 OCT 2026 to 29 OCT 2026

SC-3, 01 OCT 2026 to 29 OCT 2026