

SAN ANTONIO, TEXAS

AL-369 (FAA)

25331

WAAS CH 61209 W31A	APP CRS 308°	Rwy Ldg 8502 TDZE 790 Apt Elev 809
--	------------------------	---

RNAV (GPS) Y RWY 31L
SAN ANTONIO INTL (SAT)


RNP APCH - GPS.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or
A above 54°C. Circling NA northwest of Rwy 4 and 13R.
* RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 4200 direct HASDO and track 307° to REUBE and hold.


D-ATIS 118.9	SAN ANTONIO APP CON 125.1 307.0	SAN ANTONIO TOWER 119.8 257.8	GND CON 121.9 348.6
------------------------	---	---	-------------------------------

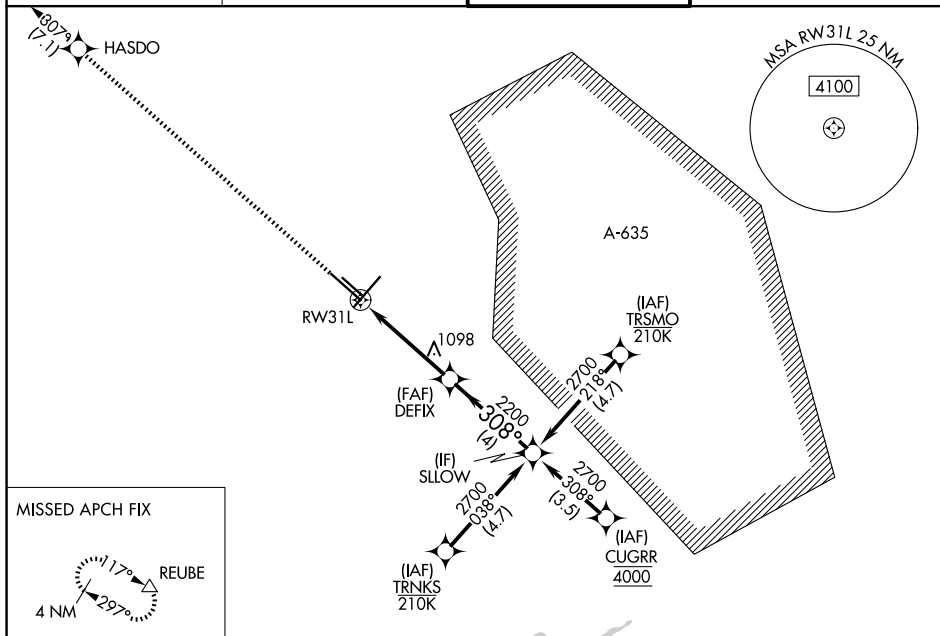

MISSED APCH FIX



ELEV 809	D	TDZE 790
----------	----------	----------

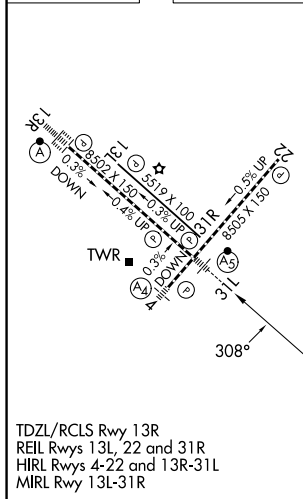

4200

↑

HASDO

✦

tr 307°

△

REUBE

△

VGSJ and RNAV glidepath not coincident
(VGSJ Angle 3.00/TCH 82).

SLOW

2700

308°

DEFIX 2200

2200

GP 3.00°
TCH 60

1.5 NM

2.8 NM

4 NM

1.5 NM to RW31L

RW31L

CATEGORY	A	B	C	D
LPV DA *	990/24		200 (200-½)	
LNAV/VNAV DA	1220/40		430 (500-¾)	
LNAV MDA	1360/24	570 (600-½)	1360/60	570 (600-1¼)
CIRCLING	1360-1	551 (600-1)	1420-1¾ 611 (700-1¼)	1520-2¼ 711 (800-2¼)

SAN ANTONIO, TEXAS

Amdt 2 25JAN24

29°32'N-98°28'W

SAN ANTONIO INTL (SAT)

RNAV (GPS) Y RWY 31L