

HI-ILS or LOC/DME Z RWY 16

LOC I-SKF 110.1	APCH CRS 158°	Rwy Idg 11,550 TDZE 690 Arprt Elev 690
---------------------------	-------------------------	---

[USAF]


KELLY FLD (KSKF)

▼ *When ALS inop, increase RVR to 40 and vis to ¾ mile.
**When ALS inop, increase RVR to 60 and vis to 1½ miles.
***Circling not authorized E of Rwy 16-34.

ALSF-1

MISSED APPROACH: Climb to 2500 via KSY R-163 until 4 DME, then continue climb to 3000 to FITER/15 DME and hold.

ATIS 120.45 273.5	SAN ANTONIO APP CON 118.05 353.5	KELLY TOWER 124.3 322.35	GND CON 121.8 289.4
-----------------------------	--	------------------------------------	-------------------------------

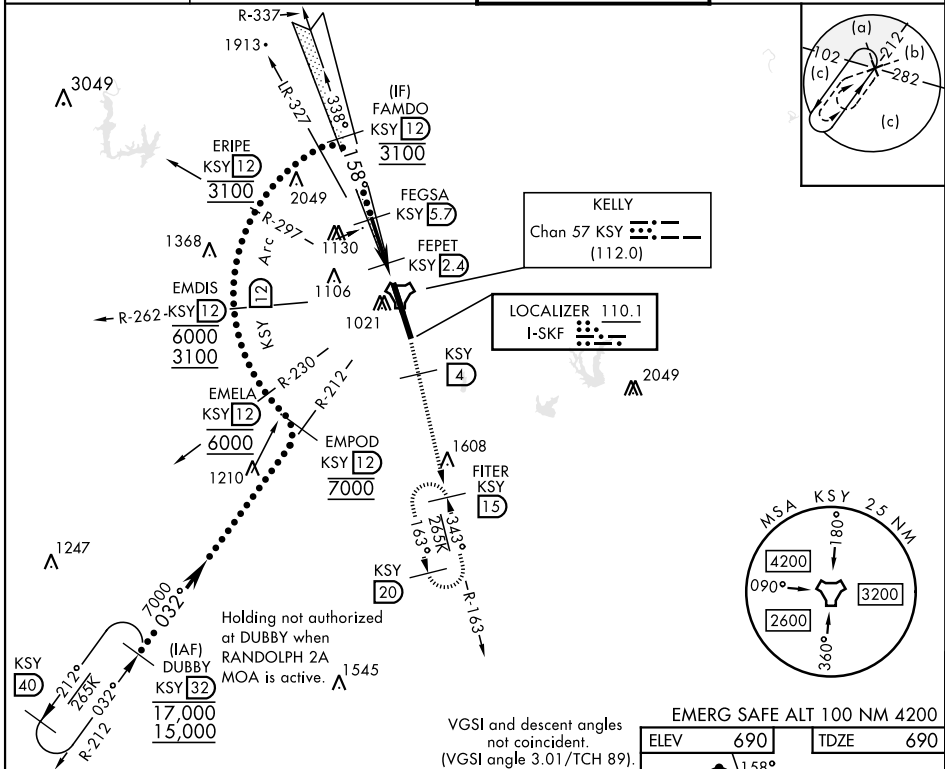

GS 3.00°
TCH 57

FAMDO Intcp LCZR R-337 KSY 12 (3100)
FEGSA KSY 5.7 (2400)
FEPET KSY 2.4 (1360)
KSY TACAN
KSY 1.3 FEPIN KSY 1 (1360)

2500 KSY R-163
3000 FITER 15

CATEGORY	C	D	E
S-ILS 16 *	890/24	200	(200-½)
S-LOC/ ** DME 16	1080/35	390	(400-¾)
*** CIRCLING	1340-1¾ 650 (700-1¾)	1900-3	1210 (1300-3)

ELEV 690 TDZE 690

EMERG SAFE ALT 100 NM 4200

707, 748, 727, 857, 855, 713, 34

HIRL Rwy 16-34

HI-ILS or LOC/DME Z RWY 16