
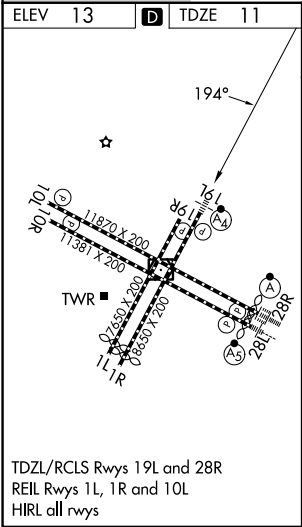


WAAS CH 58015 W19A	APP CRS 194°	Rwy Ldg 8650 TDZE 11 Apt Elev 13
--	------------------------	---

RNAV (GPS) RWY 19L
SAN FRANCISCO INTL (SFO)

RNP APCH - GPS. ⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 4°C or above 54°C. For inop ALS, increase LPV DA* (CG 357) all Cats visibility to RVR 4500. For inop ALS, increase LNAV/VNAV all Cats visibility to 2½ SM and LNAV Cats C and D visibility to 3 SM.	MALSF ⚠	MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 direct PRTLA and hold. *Missed approach requires minimum climb of 357 feet per NM to 2000.
--	------------	--

D-ATIS 113.7 115.8 118.85	NORCAL APP CON 134.5 338.2	SAN FRANCISCO TOWER 120.5 269.1	GND CON 121.8
-------------------------------------	--------------------------------------	---	-------------------------

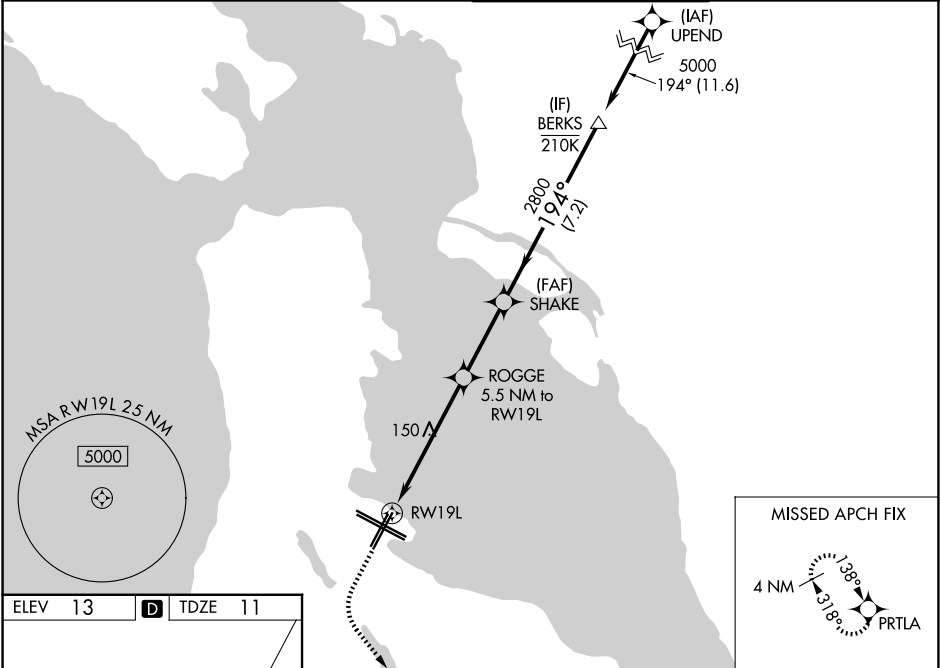

ELEV 13	D	TDZE 11
1100	4000	PRTLA
VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).		
BERKS		
5000		
GP 3.00° TCH 55		
1800		
3.2 NM		
2.3 NM		
3.1 NM		
7.2 NM		
CATEGORY	A	B
LPV DA*	293/40	282 (300-¾)
LPV DA	656-1½	645 (700-1½)
LNAV/VNAV DA*	350/40	339 (400-¾)
LNAV/VNAV DA	794-2	783 (800-2)
LNAV MDA	1100/55 1089 (1100-1)	1100-1¼ 1089 (1100-1¼)
		1100-2½ 1089 (1100-2½)