VORTAC SAV	APP CRS	Rwy Ldg	7002
115.95	181°	TDZE	47
Chan 106 (Y)		Apt Elev	50


VOR/DME or TACAN RWY 19


SAVANNAH/HILTON HEAD INTL (SAV)


Visibility reduction by helicopters NA. When local altimeter setting not received, use Hilton Head Island altimeter setting and increase all MDA 80 feet; increase S-19 Cats C/D visibility ¼ SM and Cat E visibility ½ SM; increase Circling Cats C/D visibility ¼ SM. VDP NA when using Hilton Head Island altimeter setting.

MISSED APPROACH: Climb to 800 then climbing left turn to 4000 via heading 330° and SAV R-001 to TILLS/20 DME and hold.

ATIS	SAVANNAH APP CON★	SAVANNAH TOWER★	GND CON	UNICOM
123.75	125.3 371.875	125.975 (CTAF) (L) 257.8	121.9 348.6	122.95

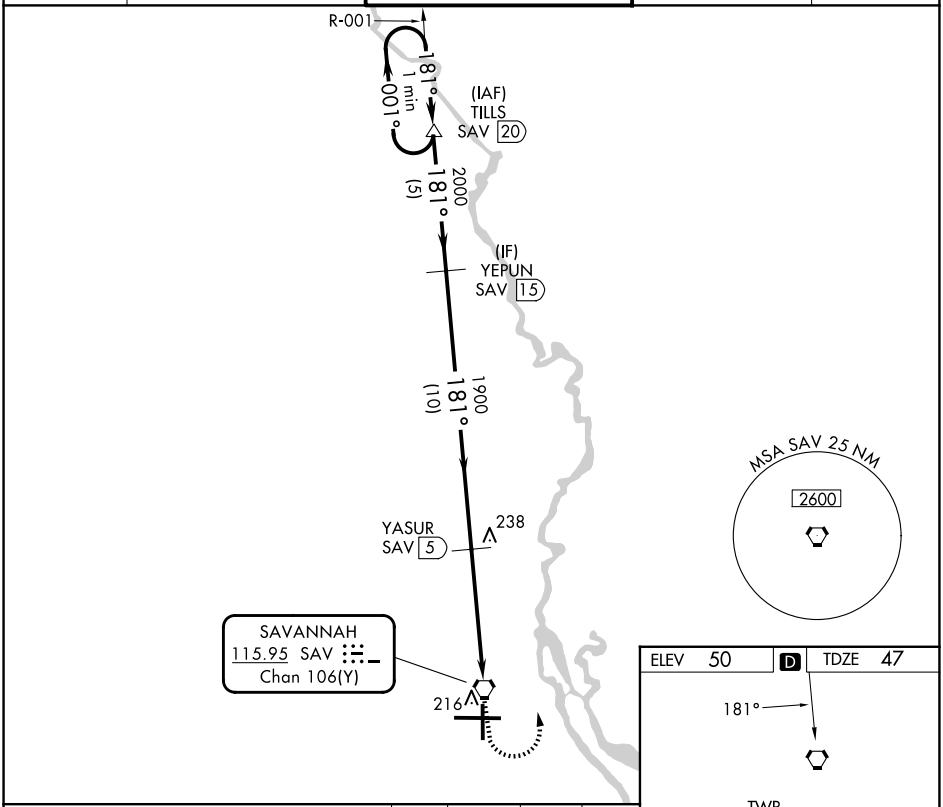

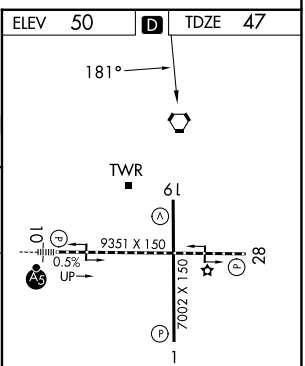

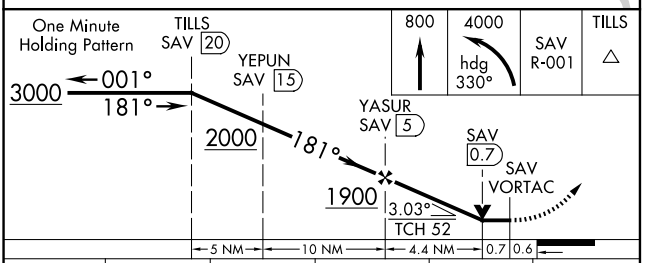

CATEGORY	A	B	C	D	E
S-19	500-1	453 (500-1)	500-1¼ 453 (500-1¼)	500-1½	453 (500-1½)
CIRCLING	520-1	470 (500-1)	740-2 690 (700-2)	740-2¼ 690 (700-2¼)	900-3 850 (900-3)

TDZL/RCLS Rwy 10
REIL Rwys 19 and 28 (L)
HIRL Rwys 1-19 and 10-28 (L)

SE-4, 01 OCT 2026 to 29 OCT 2026