


WAAS CH 99323 W21A	APP CRS 210°	Rwy Ldg TDZE 1430 Apt Elev 1430
--	------------------------	---

RNAV (GPS) RWY 21

JOE FOSS FLD (FSD)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climb to 4000 direct KASME and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.		

ATIS 126.6	SIoux FALLS APP CON★ 125.8 284.725	SIoux FALLS TOWER★ 118.3 (CTAF) 0 257.8	GND CON 121.9 348.6	UNICOM 122.95
----------------------	--	---	-------------------------------	-------------------------

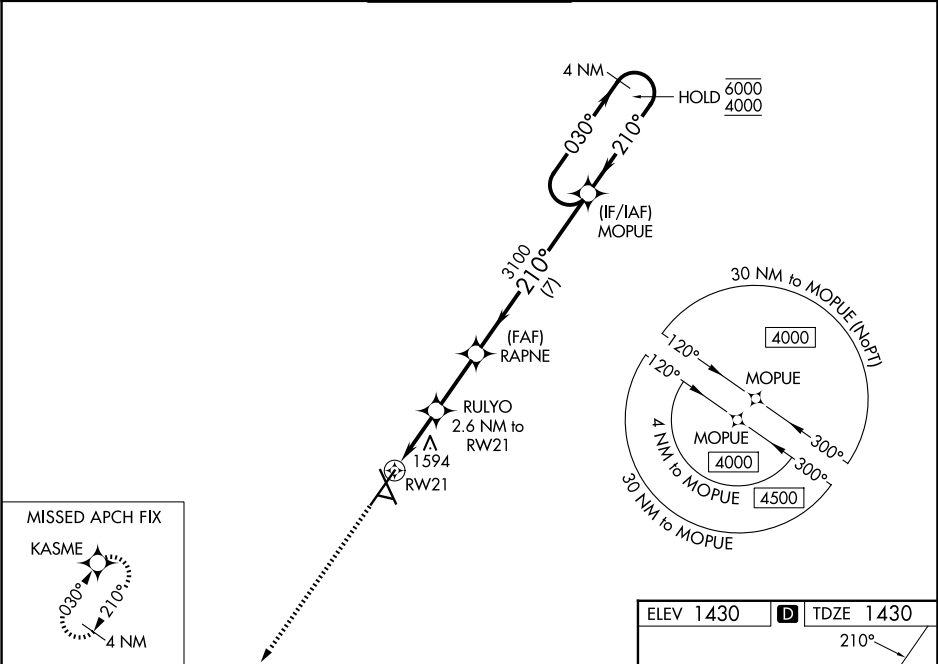

4000	KASME	MOUE	4 NM Holding Pattern	6000 4000	GP 3.00° TCH 49
1.2 NM to RW21	1.4 NM to RW21	2.5 NM to RW21	7 NM to MOUE		
CATEGORY	A	B	C	D	
LPV DA	1630/18	200 (200-½)			
LNAV/VNAV DA	1704/24	274 (300-½)			
LNAV MDA	1860/24	430 (500-½)	1860/40	430 (500-¾)	
CIRCLING	1980-1	550 (600-1)	2060-1¾ 630 (700-1¾)	2200-2½ 770 (800-2½)	

