

WAAS Ch 87099 W13A	APP CRS 130°	Rwy Ldg 4559 TDZE 388 Apt Elev 390
--	------------------------	---


RNAV (GPS) RWY 13
TEXARKANA RGNI-WEBB FLD (TXK)

RNP APCH - GPS.

▼ Baro-VNAV and VDP NA when using De Queen altimeter setting. Rwy 13 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use De Queen altimeter setting and increase LPV DA to 748 feet and all Cats visibility $\frac{1}{4}$ SM, LNAV/VNAV DA to 868 feet all Cats visibility $\frac{3}{8}$ SM, and all MDAs 100 feet LNAV and Circling Cats C/D visibility $\frac{1}{4}$ SM.

MISSED APPROACH:
Climb to 2000 direct
WATLE and hold.

ATIS 120.2	FORT WORTH CENTER 123,925 269,475	TEXARKANA TOWER ★ 123.875 (CTAF) 0 235,625	GND CON 119,225
----------------------	---	--	---------------------------

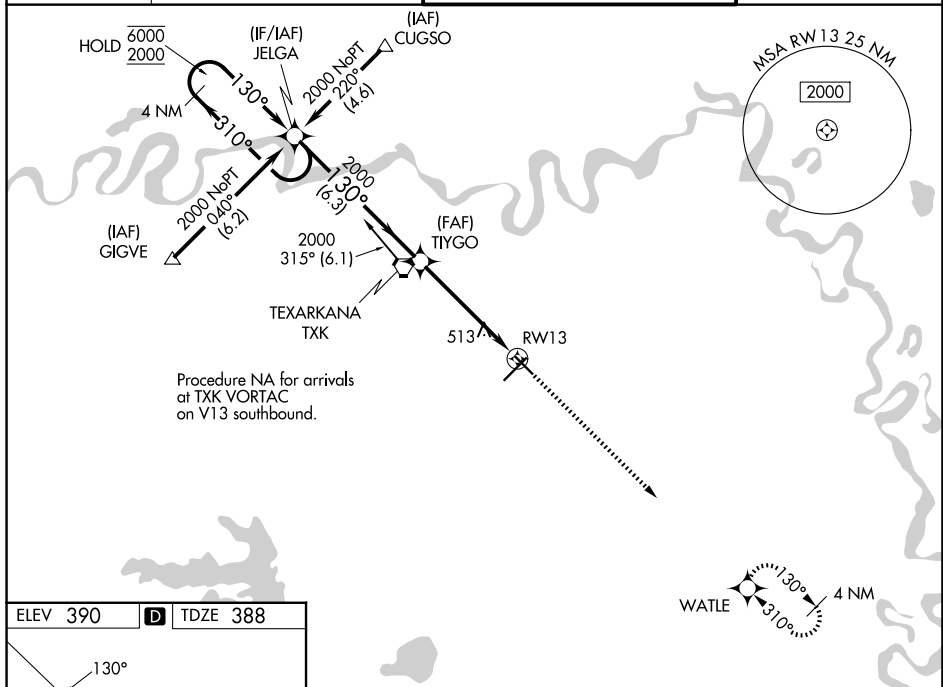

4 NM Holding Pattern

JELGA

TIYGO 2000

6000 ← 310°

2000 ← 130°

GP 3.00° TCH 54

1.2 NM to RW13

RW13

6.3 NM

3.8 NM

1.2 NM

VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 48).

2000

WATLE