
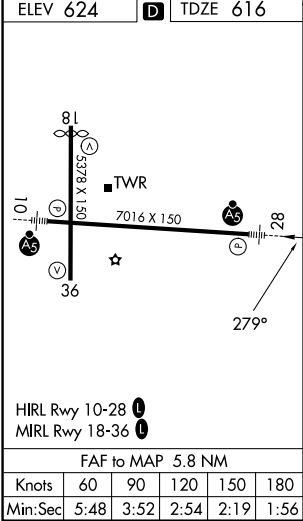




LOC I-TVC	APP CRS	Rwy Ldg
110.7	279°	7016
	TDZE	616
	Apt Elev	624

ILS or LOC RWY 28

CHERRY CAPITAL (TVC)

RNP APCH - GPS.		MALSR 	MISSED APPROACH: Climb to 1100 then climbing left turn to 3000 direct TVC VOR/DME and hold, continue climb-in-hold to 3000.	
Aircraft not GPS equipped - RADAR required for procedure entry.				
 S-LOC 28 minimums: For inop ALS, increase S-LOC 28 Cats C and D visibility to 2½ SM. AYATA FIX minimums: For inop ALS, increase S-LOC 28 Cats C and D visibility to 2 SM.  -21°C				
ATIS 119.175	MINNEAPOLIS CENTER 132.9 338.3	TRAVERSE CITY TOWER ★ 124.2 (CTAF) 0 348.6	GND CON 121.8 348.6	UNICOM 122.95

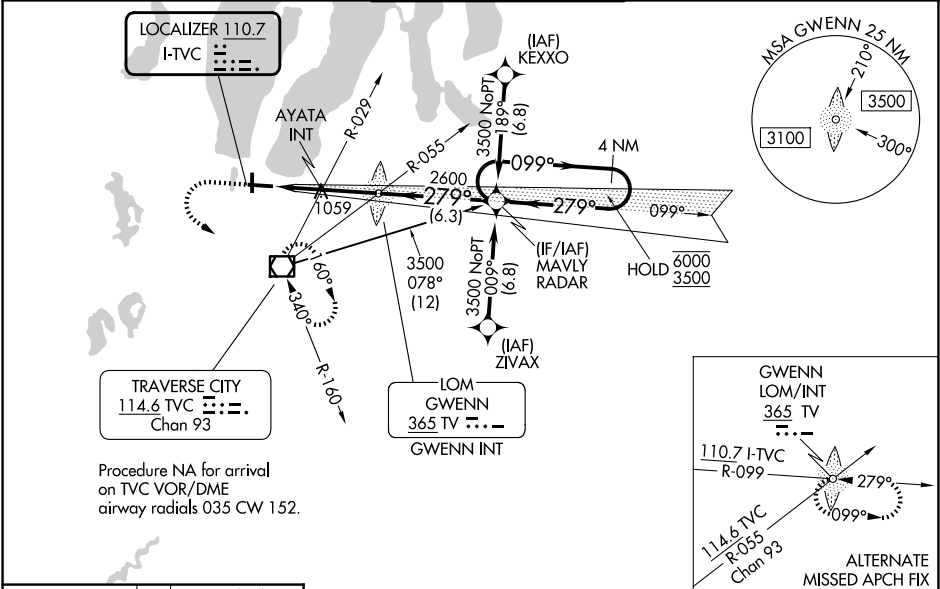

	1100 	3000 	TVC 	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 45).			
				TV LOM GWENN INT AYATA INT 2496 279° 2600 2.7 NM 3 NM 6.3 NM			
				MAVLY RADAR 4 NM Holding Pattern 099° 279° 6000 3500 GS 3.00° TCH 52			
CATEGORY	A		B	C	D		
S-ILS 28	816-1/2		200 (200-1/2)				
S-LOC 28	1440-1/2 824 (900-1/2)	1440-3/4 824 (900-3/4)	1440-1 7/8	824 (900-1 7/8)			
CIRCLING	1440-1 1/4	816 (900-1 1/4)	1440-2 1/2 816 (900-2 1/2)	1720-3 1096 (1100-3)			
AYATA FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)							
S-LOC 28	1320-1/2	704 (700-1/2)	1320-1 5/8	704 (700-1 5/8)			
CIRCLING	1320-1	696 (700-1)	1420-2 1/4 796 (800-2 1/4)	1720-3 1096 (1100-3)			