

WAAS
CH **42610**
W10A

APP CRS
099°

Rwy Ldg
TDZE **624**
Apt Elev **624**

RNAV (GPS) RWY 10
CHERRY CAPITAL (TVC)

RNP APCH - GPS.

▼

⚠


❄ -21°C

Rwy 10 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.
For inop ALS, increase LPV visibility all Cats to ¾ SM. Inop table does not apply to LNAV/VNAV all Cats and LNAV Cats C and D.

MALS R

MISSED APPROACH:
Climb to 4000 direct
ROPTe and on track
1.57° to LADIN
and hold.

ATIS 119.175	MINNEAPOLIS CENTER 132.9 338.3	TRAVERSE CITY TOWER* 124.2 (CTAF) 0 348.6	GND CON 121.8 348.6	UNICOM 122.95
------------------------	--	---	-------------------------------	-------------------------

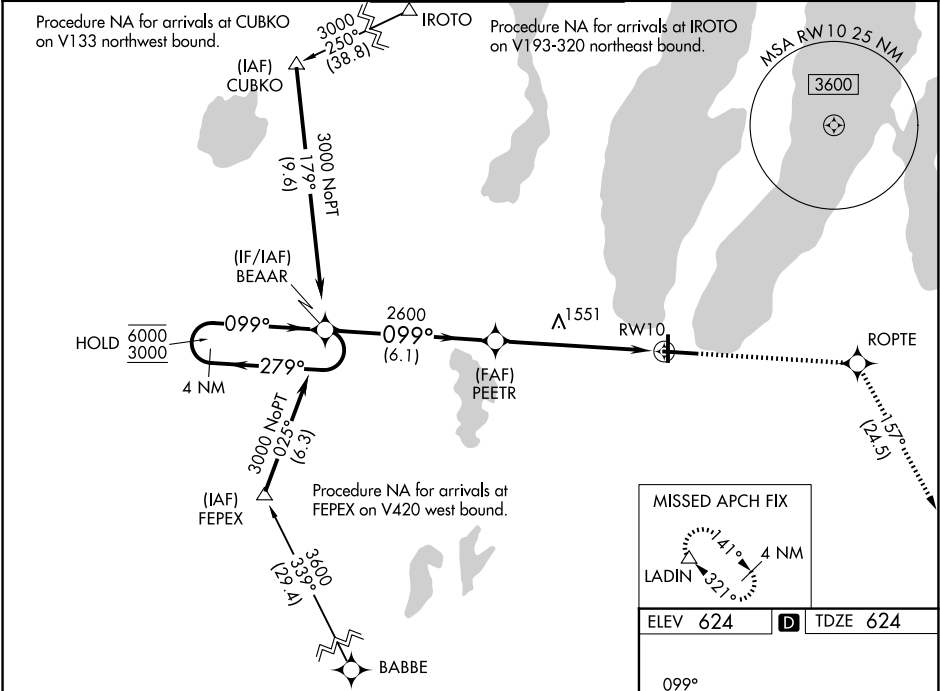

4 NM Holding Pattern

BEAAR

PEETR

4000

ROPTe

tr 157°

LADIN

6000 ← 279°

3000 → 099°

GP 3.00°

TCH 52

2600

6.1 NM

2.6 NM

3.4 NM

RW10

CATEGORY	A	B	C	D
LPV DA	909-¾ 285 (300-¾)			
LNAV/VNAV DA	1780-4 1156 (1200-4)			
LNAV MDA	1780-¾ 1156 (1200-¾)	1780-1 1156 (1200-1)	1780-3 1156 (1200-3)	
CIRCLING	1780-1¼ 1156 (1200-1¼)	1780-1½ 1156 (1200-1½)	1780-3 1156 (1200-3)	

MISSED APCH FIX

LADIN

157°

4 NM

ELEV 624

D

TDZE 624

099°

8 L

5378 X 150

TWR

7016 X 150

36

38

HIRL Rwy 10-28

MIRL Rwy 18-36