

WAAS
CH **97535**
W28A

APP CRS
279°

Rwy Ldg
TDZE
Apt Elev

7016
616
624

RNAV (GPS) RWY 28

CHERRY CAPITAL (TVC)

RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Baro-VNAV and VDP NA when using ACB altimeter setting. When local altimeter setting not received, use ACB altimeter setting: increase DA 51 feet and all MDA 60 feet. Increase LPV all Cats visibility 1/8 SM, LNAV/VNAV visibility all Cats 1/4 SM and LNAV Cat B visibility 1/4 SM and C/D visibilities 1/8 SM and Circling Cat B/C visibility 1/4 SM. For inop ALS, increase LPV all Cats visibility to 1 1/4 SM, LNAV Cats C/D visibility to 2 SM. For inop ALS when using ACB altimeter setting, increase LPV all Cats visibility to 1 1/2 SM, LNAV Cats C/D visibility to 2 1/2 SM. *Missed approach requires minimum climb of 237 feet per NM to 2000.

-21°C

MALSR

MISSED APPROACH:
Climb to 3000 direct
BEAAR and hold.

ATIS 119.175	MINNEAPOLIS CENTER 132.9 338.3	TRAVERSE CITY TOWER ★ 124.2(CTAF) 348.6	GND CON 121.8 348.6	UNICOM 122.95
------------------------	--	---	-------------------------------	-------------------------

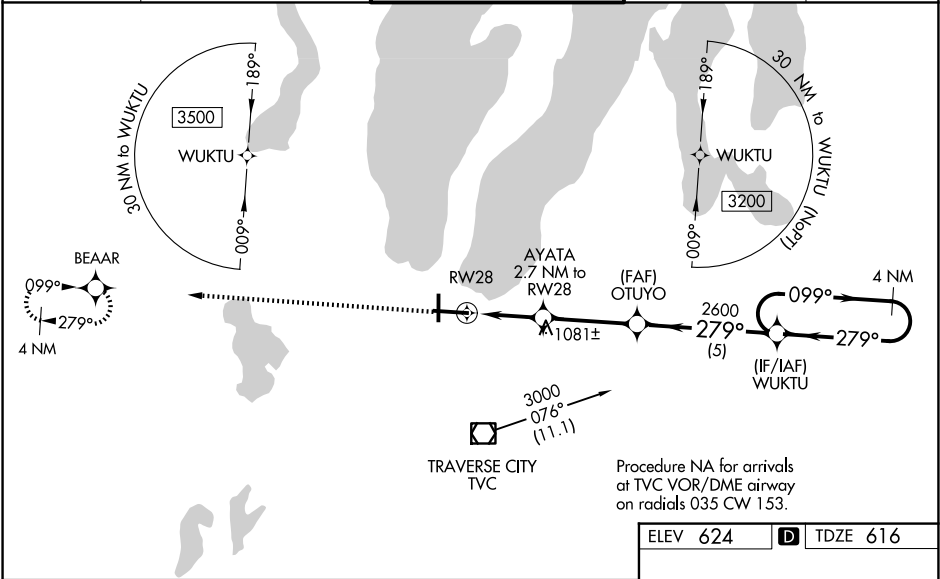

3000	BEAAR	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 45).	WUKTU	4 NM Holding Pattern
AYATA 2.7 NM to RW28	OTUYO 2600	2600	099° → 3000	GP 3.00° TCH 52
2.2 NM to RW28	1520	2600	279° ← 279°	
2.2 NM	0.5 NM	3.4 NM	5 NM	
CATEGORY	A	B	C	D
LPV DA		* 816-1/2	200 (200-1/2)	
LPV DA		963-7/8	347 (400-7/8)	
LNAV/VNAV DA		1330-2	714 (800-2)	
LNAV MDA	1340-1/2	724 (800-1/2)	1340-1 5/8	724 (800-1 5/8)
CIRCLING	1340-1	716 (800-1)	1500-2 1/2 876 (900-2 1/2)	1720-3 1096 (1100-3)