

WAAS CH 53611 W22A	APP CRS 223°	Rwy Ldg 4945 TDZE 23 Apt Elev 24
--	------------------------	---

RNAV (GPS) RWY 22


VERO BEACH RGNL (VRB)

⚠


Circling to Rwy 30R NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Fort Pierce altimeter setting and increase LPV DA to 363 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 567 feet and all visibilities ½ SM; increase all MDAs 40 feet and LNAV Cat C/D visibility ¼ SM and Circling Cat C/D visibility ¼ SM. Baro-VNAV and VDP NA when using Fort Pierce altimeter setting. Rwy 22 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 2000 direct JINSO and hold.

ATIS 120.575	PALM BEACH APP CON 123.625 225.4(N)	VERO BEACH TOWER ★ 126.3 (CTAF) 0	GND CON 127.45	UNICOM 122.95
------------------------	---	---	--------------------------	-------------------------

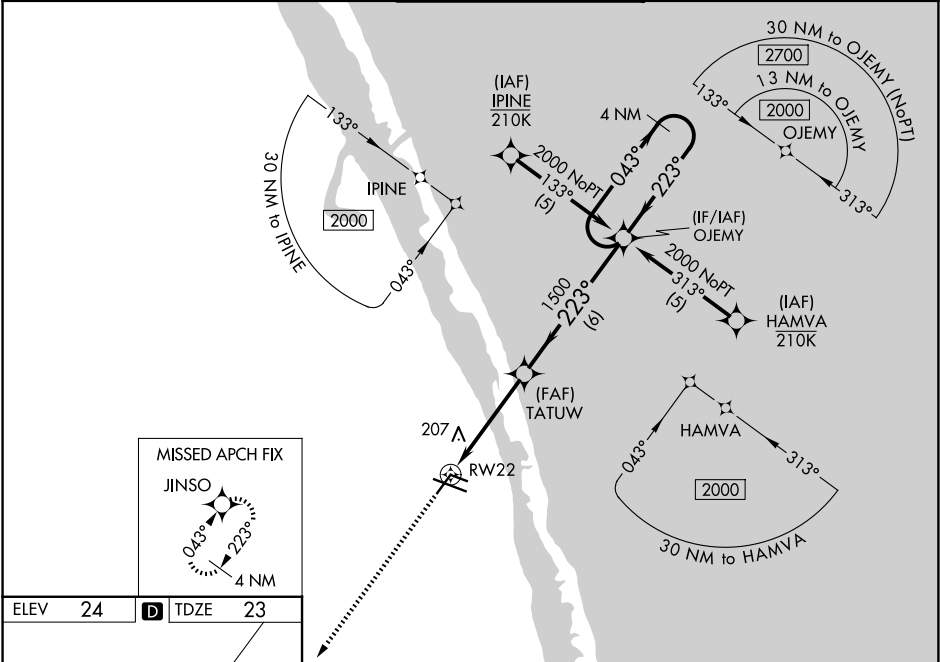

ELEV 24	D	TDZE 23
---------	----------	---------

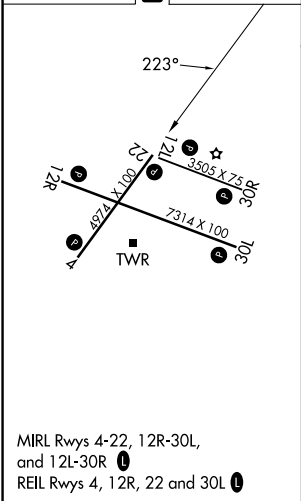

2000 ↑		JINSO ✧		4 NM Holding Pattern	
*LNAV only.		TATUW 1500		OJEMY 2000	
RW22 1.4 NM to RW22		223° 1500		043° ← 223°	
GP 3.00° TCH 42					
1.4		3.1 NM		6 NM	
CATEGORY	A	B	C	D	
LPV DA	340-1		317 (400-1)		
LNAV/ VNAV DA	544-1¾		521 (600-1¾)		
LNAV MDA	520-1	497 (500-1)	520-1¾	497 (500-1¾)	
CIRCLING	560-1	536 (600-1)	660-1¾ 636 (700-1¾)	820-2½ 796 (800-2½)	