

LOC I-ILG <u>110.3</u>	APP CRS 015°	Rwy Ldg 7012 TDZE 76 Apt Elev 80
----------------------------------	------------------------	---

ILS or LOC RWY 1
NEW CASTLE (ILG)

ADF required.

RADAR required to define BLARE.


⚠ When local altimeter setting not received, use Philadelphia altimeter setting increase all DA to 330 feet and all MDA 60 feet; increase S-LOC 1 Cats C/D visibility to 1½ SM and Circling visibility Cat C to 1½ SM, Cat D to 2½ SM; increase CASTL fix minimums S-LOC 1 Cats C/D visibility to RVR 5000 and Circling Cat D to 2½ SM. For inop ALS increase S-LOC 1 Cat C/D to 1½ SM for CASTL fix minimums, increase S-LOC 1 Cats C/D visibility to 1½ SM. For inop ALS when using Philadelphia Intl altimeter setting, increase S-LOC 1 Cat C and D visibility to 1½ SM; CASTL fix minimums S-LOC 1 Cats C/D to 1½ SM. ***RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using Philadelphia Intl altimeter setting).

MALSR




MISSED APPROACH:
Climb to 900 then
climbing left turn to
2000 direct HADIN
LOM and hold.

ATIS 123.95	PHILADELPHIA APP CON 118.35 323.1	WILMINGTON TOWER ★ 126.0 (CTAF) 352.05	GND CON 121.7 275.8	UNICOM 122.95
----------------	--------------------------------------	---	------------------------	------------------

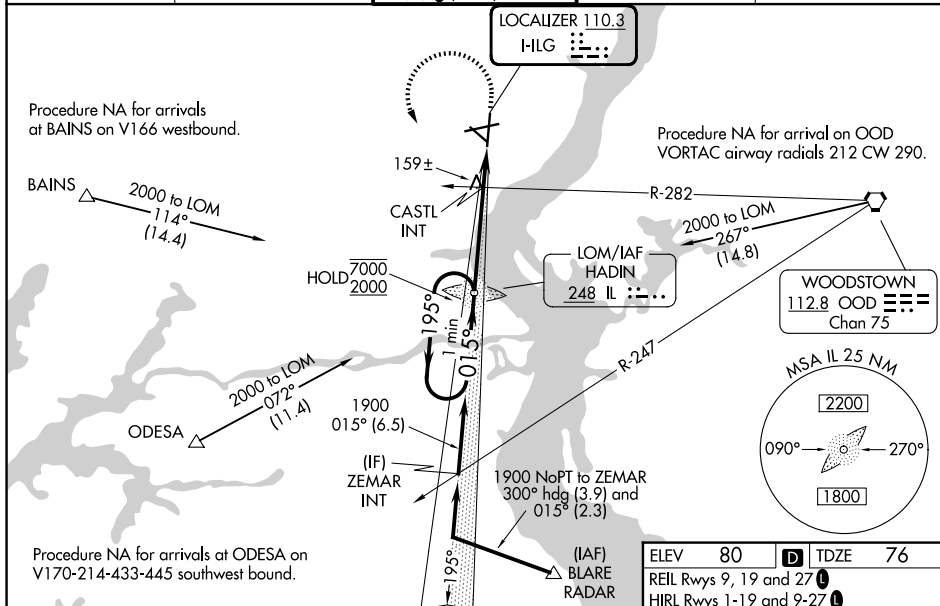

NE-3, 01 OCT 2026 to 29 OCT 2026

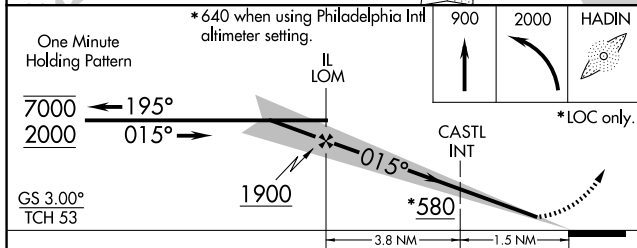

CATEGORY	A	B	C	D
S-ILS 1**	276/24 200 (200-½)			
S-LOC 1	580/24 504 (500-½)	580/55 504 (500-1)		
CIRCLING	580-1 500 (500-1)	600-1½ 520 (600-1½)		800-2¼ 720 (800-2¼)
CASTL FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)				
S-LOC 1	480/24 404 (400-½)		480/40 404 (400-¾)	
CIRCLING	540-1 460 (500-1)	560-1 480 (500-1)	600-1½ 520 (600-1½)	800-2¼ 720 (800-2¼)

