

WAAS CH 70632 W35A	APP CRS 351°	Rwy Ldg TDZE 583 Apt Elev 595
--	------------------------	---

RNAV (GPS) RWY 35


SAN MARCOS RGNL (HYI)

⚠


Baro-VNAV NA when using New Braunfels altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (3°F) or above 54°C (130°F). When local altimeter setting not received, use New Braunfels altimeter setting and increase all DA 43 feet and all MDA 60 feet; increase LPV all Cats and LNAV/VNAV all Cats visibility ½ mile; and increase LNAV Cat C/D/E visibility and Circling Cat C/D visibility ¼. Circling NA for Cat E SW of Rwy 13-31. DME/DME RNP-0.3 NA. VDP NA with New Braunfels altimeter setting.

MISSED APPROACH:
Climb to 3100 direct PUKY and hold.

ATIS 120.825	AUSTIN APP CON 119.0 370.85	SAN MARCOS TOWER★ 126.825 (CTAF) 1	GND CON 120.125
------------------------	---------------------------------------	---	---------------------------

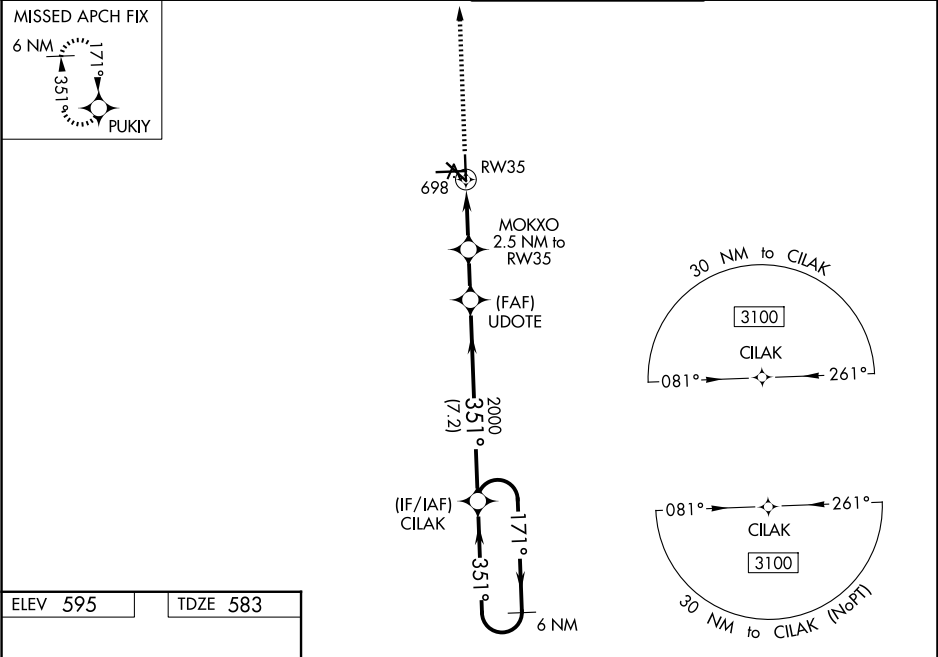

ELEV 595	TDZE 583
----------	----------

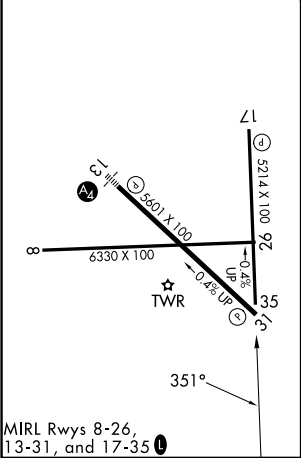

MIRL Rwy 8-26,
13-31, and 17-35

AUSTIN, TEXAS
Orig-B 23JUN16

3100

↑

PUKY

✦

6 NM

Holding Pattern

*LNAV only.

MOKXO

2.5 NM to RW35

UDOTE

2000

CILAK

*1 NM to RW35

↻

RW35

1420*

2000

171°

←351°

3100

GP 3.00°

TCH 55

1 NM

1.5 NM

1.8 NM

7.2 NM

CATEGORY

A

B

C

D

E

LPV DA

833-¾

250 (300-¾)

LNAV/VNAV DA

884-1

301 (300-1)

LNAV MDA

960-1

377 (400-1)

960-1½

377 (400-1½)

CIRCLING

1080-1

485 (500-1)

1120-1

525 (600-1)

1240-1¾

645 (700-1¾)

1320-2¼

725 (800-2¼)

1340-2¾

745 (800-2¾)

29°54'N-97°52'W

SAN MARCOS RGNL (HYI)

RNAV (GPS) RWY 35