



ILS or LOC RWY 13

LOC I-OVI <u>110.35</u>	APCH CRS 128°	Rwy Idg 8194 TDZE 4294 Arpt Elev 4295	[USAF]	CANNON AFB (KCVS)	
RADAR or DME required. Missed approach requires use of RNAV or RADAR monitoring. ▼ *When ALS inop, increase vis to ¾ mile. **When ALS inop, increase CAT AB vis to 1 mile; CAT CDE vis to 1½ miles.			MALSR 	MISSED APPROACH: Climb to 6000 out CVS TACAN R-1305.6 DME (HOMEP) then climbing right turn to 7000 intercept CVS R-193 to 12 DME (CLINK) and hold.	
ATIS 119.1 269.9		APP CON 118.425 352.1	TOWER 120.4 270.25	GND CON 121.9 275.8	

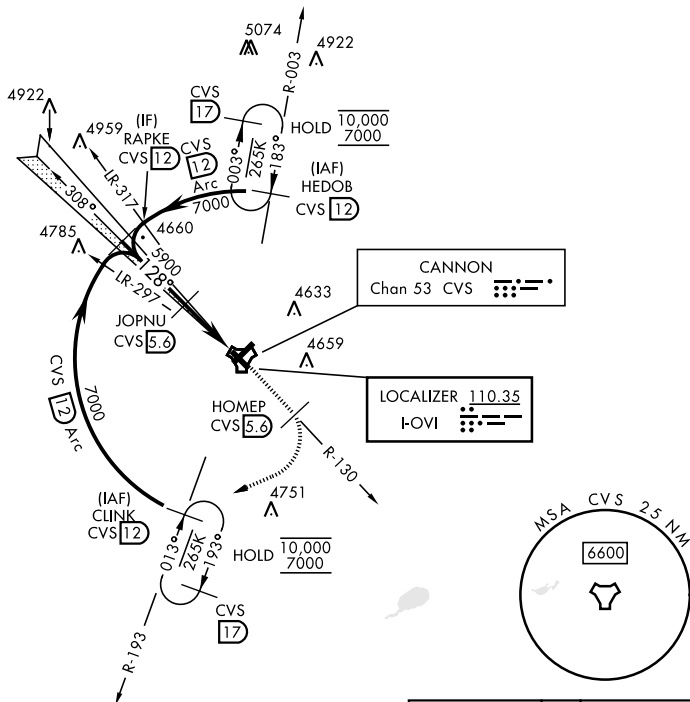

EMERG SAFE ALT 100 NM 8000

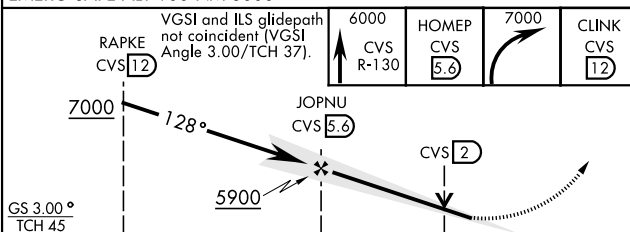

CATEGORY		A	B	C	D	E
S-ILS 13 *		4544-½			250	(300-½)
S-LOC 13 **		4760-½ 466 (500-½)		4760-1 466 (500-1)		
CIRCLING		4840-1 545 (600-1)		4860-1½ 565(600-1½)	5000-2¼ 705(800-2¼)	5020-2½ 725(800-2½)