CLOVIS, NEW MEXICO

RNAV (GPS) RWY 13

CANNON AFB (KCVS)

(USAF)

APCH CRS	Rwy ldg	8194
128°	TDZE	4294
	Arpt Elev	4295

RNP APCH


* When ALS inop increase vis to 1 3/8 miles.
** When ALS inop, increase CAT AB vis to 1 mile, CAT CDE vis to 1 1/2 miles.


MALSR (A5)

MISSED APPROACH: Climb to 7000 direct HOMEP, then track 128° to SOPLE and hold.

ATIS	CANNON APP CON	TOWER	GND CON
119.1 269.9	118.425 352.1	120.4 270.25	121.9 275.8

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C or above 54°C.

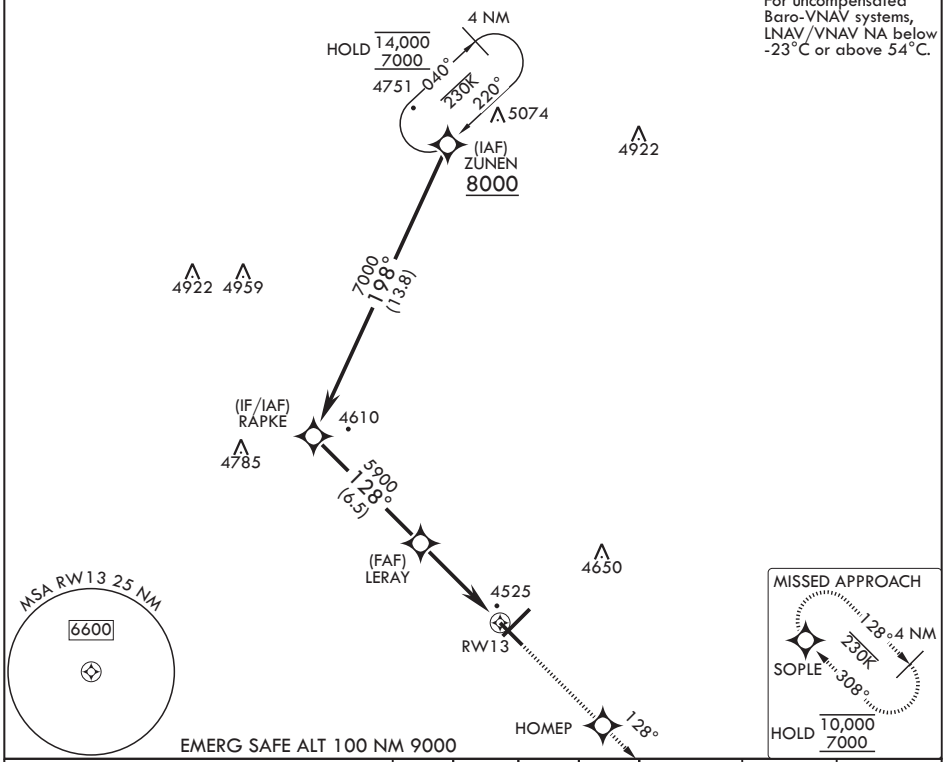

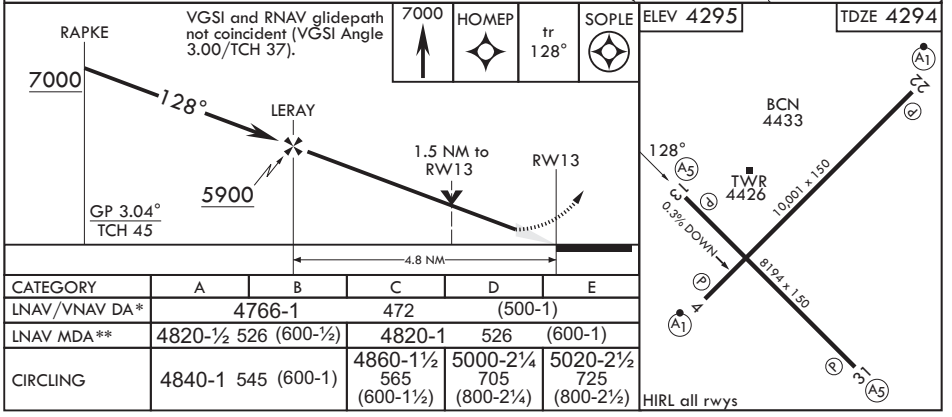

CATEGORY	A	B	C	D	E
LNAV/VNAV DA*	4766-1		472	(500-1)	
LNAV MDA**	4820-½	526 (600-½)	4820-1	526	(600-1)
CIRCLING	4840-1	545 (600-1)	4860-1½ 565 (600-1½)	5000-2¼ 705 (800-2¼)	5020-2½ 725 (800-2½)

CLOVIS, NEW MEXICO

34°23'N - 103°19'W

CANNON AFB (KCVS)

Amdt 4 07OCT21

RNAV (GPS) RWY 13

SW-1, 01 OCT 2026 to 29 OCT 2026