

WAAS
CH **50421**
W18A

APP CRS
184°

Rwy Ldg
TDZE **396**
Apt Elev **422**

RNAV (GPS) RWY 18


EVANSVILLE RGNL (E V V)

ASR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Circling Rwy 9 NA at night. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 2500 direct ADABN and hold.

ATIS 120.2	EVANSVILLE APP CON ★ 124.025 290.9	EVANSVILLE TOWER ★ 118.7(CTAF) 257.8	GND CON 121.9	UNICOM 122.95
----------------------	--	--	-------------------------	-------------------------

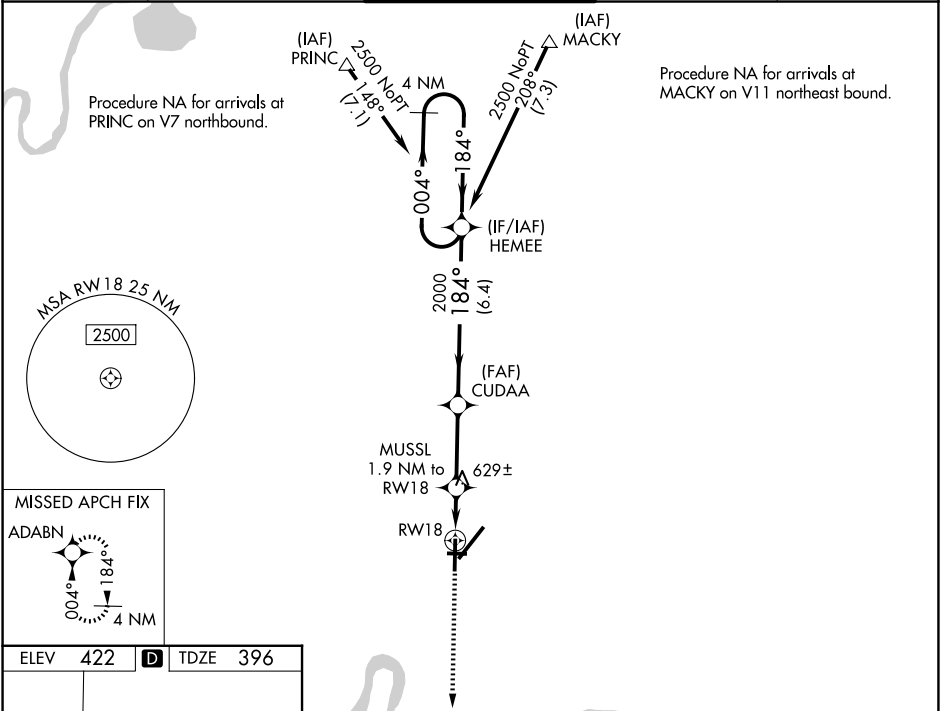

2500

ADABN

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 49).

4 NM Holding Pattern

↑

*LNAV only

MUSSL
1.9 NM to RW18

RW18

HEMEE

2000

2500

GP 3.00°
TCH 60

1.1

0.8

3 NM

6.4 NM

*1.1 NM to RW18

*1060

CATEGORY	A		B		C	D
LPV DA	596-¾		200 (200-¾)			
LNAV/VNAV DA	931-1¾		535 (600-1¾)			
LNAV MDA	880-1	484 (500-1)	880-1⅜	484 (500-1⅜)		
CIRCLING	920-1 498 (500-1)	1040-1 618 (700-1)	1040-1¾ 618 (700-1¾)	1040-2 618 (700-2)		

HIRL Rwy 4-22 and 18-36

REIL Rwy 4, 18, and 36

MIRL Rwy 9-27