
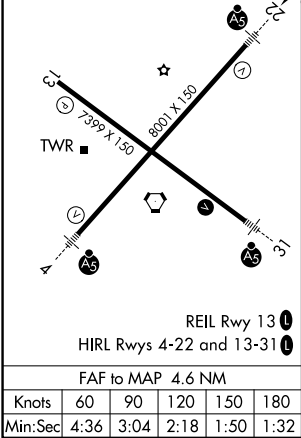


LOC I-LQY 111.7	APP CRS 223°	Rwy Ldg TDZE Apt Elev	8001 598 598
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 22
ABRAHAM LINCOLN CAPITAL (SPI)

ADF or RADAR required for procedure entry. DME required.		MALSR 	MISSED APPROACH: Climb to 1500 then climbing right turn to 2700 on heading 250° and on SPI VORTAC R-235 to CUBVO/SPI 12 DME and hold.
 VDP NA when using AAA altimeter setting. When local altimeter setting not received, use AAA altimeter setting; increase S-ILS 22 DA to 856 feet; increase all MDAs 60 feet and S-LOC 22 visibility Cat C/D ¼ SM, and Circling Cat C/D visibility ¼ SM.			

ATIS 127.65 270.1	SAINT LOUIS APP CON 126.15 323.0	SPRINGFIELD TOWER ★ 121.3 (CTAF) 0 257.8	GND CON 121.9 348.6	UNICOM 122.95
-----------------------------	--	--	-------------------------------	-------------------------

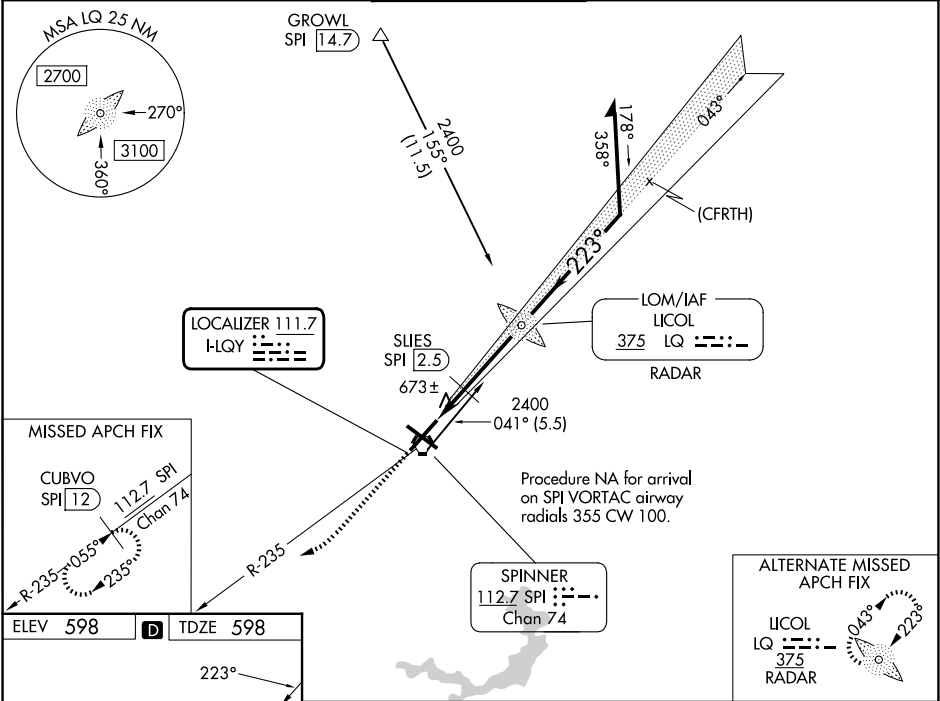

1500	2700	SPI R-235	CUBVO SPI 12	LQ LOM LICOL RADAR	Remain within 10 NM
↑	hdg 250°			2119	043°
		SLIES SPI 2.5		2400	223°
		1140		2400	
		1.5 NM	3.1 NM		GS 3.00° TCH 54
CATEGORY	A	B	C	D	
S-ILS 22	798-½ 200 (200-½)				
S-LOC 22	980-½ 382 (400-½)		980-⅝ 382 (400-⅝)		
CIRCLING	1040-1 442 (500-1)	1100-1 502 (600-1)	1360-2¼ 762 (800-2¼)	1380-2½ 782 (800-2½)	

EC-3, 01 OCT 2026 to 29 OCT 2026

EC-3, 01 OCT 2026 to 29 OCT 2026