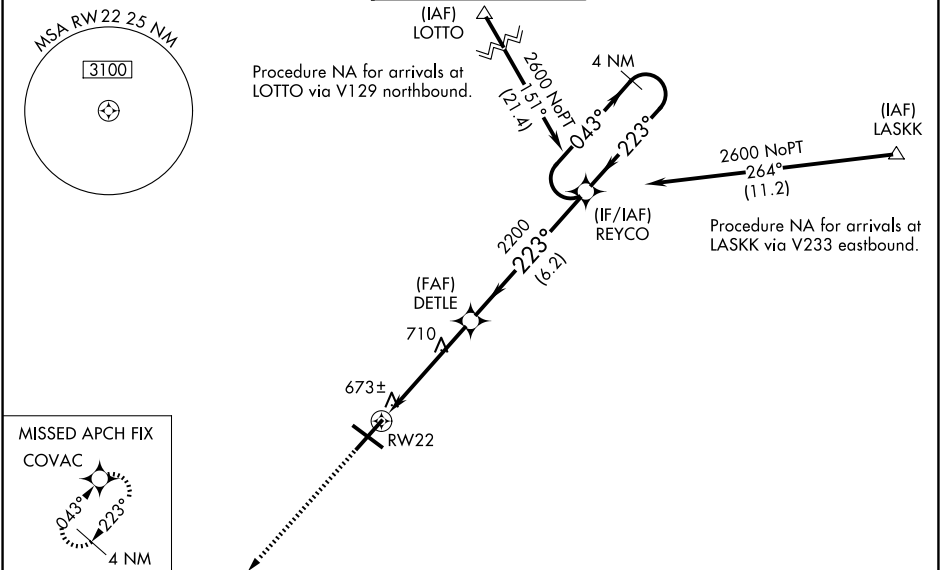


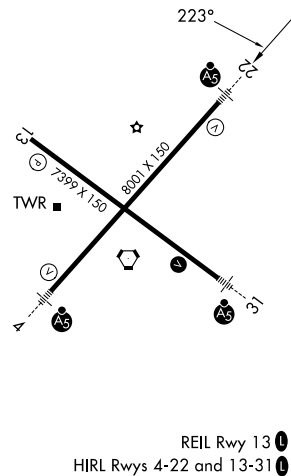
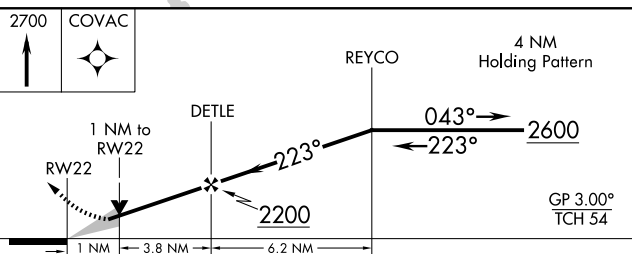
WAAS CH 81809 W22A	APP CRS 223°	Rwy Ldg TDZE 598 Apt Elev 598
--	------------------------	---

RNAV (GPS) RWY 22

ABRAHAM LINCOLN CAPITAL (SPI)

RNP APCH - GPS.				MALSR 	MISSED APPROACH: Climb to 2700 direct COVAC and hold.	
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter not received, use Lincoln altimeter setting: increase LPV DA to 942 feet and all visibilities 1/8 SM, LNAV/VNAV DA to 1108 feet and all visibilities 1/8 SM; increase all MDAs 60 feet and visibility LNAV and Circling Cat C/D 1/4 SM. Baro-VNAV and VDP NA when using Lincoln altimeter setting. For inop ALS, increase LPV all Cats visibility to 1/8 SM. For inop ALS when using Lincoln altimeter setting, increase LPV all Cats visibility to 1 SM, increase LNAV/VNAV all Cats visibility to 1 1/8 SM.						
ATIS 127.65 270.1		SAINT LOUIS APP CON 126.15 323.0		SPRINGFIELD TOWER ★ 121.3 (CTAF) 0 257.8	GND CON 121.9 348.6	UNICOM 122.95



ELEV 598	D	TDZE 598
		
REIL Rwy 13 HIRL Rwy 4-22 and 13-31		
		
CATEGORY A B C D		
LPV DA 884-1/2 286 (300-1/2)		
LNAV/VNAV DA 1050-7/8 452 (500-7/8)		
LNAV MDA 980-1/2 382 (400-1/2) 980-5/8 382 (400-5/8)		
CIRCLING 1040-1 1/4 1100-1 1/4 1360-2 1/4 1380-2 1/2 442 (500-1 1/4) 502 (600-1 1/4) 762 (800-2 1/4) 782 (800-2 1/2)		