

WAAS CH 70309 W04A	APP CRS 043°	Rwy Ldg 7927 TDZE 592 Apt Elev 598
--	------------------------	---

RNAV (GPS) RWY 4

RNP APCH - GPS.


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using AAA altimeter setting. For inop ALS, increase LPV all Cats visibility to RVR 4500 and LNAV Cats C and D visibility to 1 3/8 SM. When local altimeter setting not received, use AAA altimeter setting and increase LPV DA to 912 feet; increase LNAV/VNAV DA to 989 feet and all visibilities to RVR 3500; increase all MDAs 60 feet and LNAV visibility Cats C and D to RVR 5500 and Circling visibility Cats C and D 1/4 SM. For inop ALS when using AAA altimeter setting, increase LPV all Cats visibility to RVR 4500.

MALSR



MISSED APPROACH:
Climb to 2600 direct
REYCO and hold.

ATIS 127.65 270.1	SAINT LOUIS APP CON 126.15 323.0	SPRINGFIELD TOWER ★ 121.3 (CTAF) 0 257.8	GND CON 121.9 348.6	UNICOM 122.95
----------------------	-------------------------------------	---	------------------------	------------------

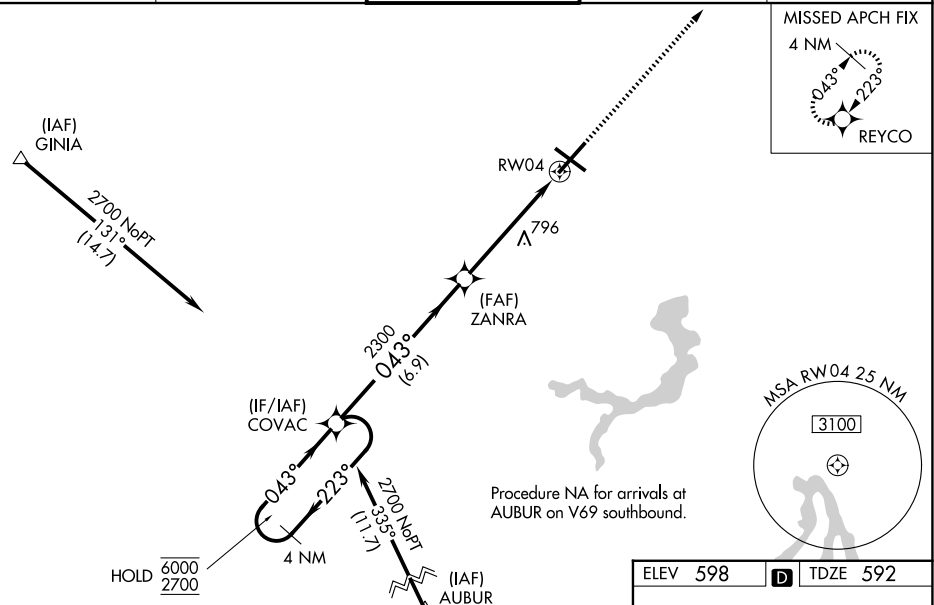4 NM
Holding Pattern

COVAC


$$\begin{array}{r} 6000 \\ 2700 \\ \hline \end{array}$$

GP 3.00°
TCH 56

CATEGORY	A	B	C	D
LPV DA	854/24		262 (300-½)	
LNAV/VNAV DA	931/26		339 (400-½)	
LNAV MDA	1060/24 468 (500-½)		1060/50 468 (500-1)	
CIRCLING	1060-1 462 (500-1)	1100-1 502 (600-1)	1360-2¼ 762 (800-2¼)	1380-2½ 782 (800-2½)

1	2
---	---

TDZE 592

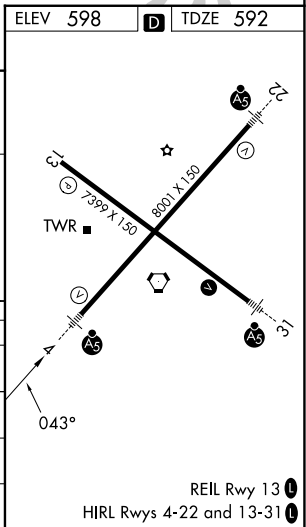

SPRINGFIELD, ILLINOIS

Orig-F 02OCT25

39°51'N-89°41'W

ABRAHAM LINCOLN CAPITAL (SPI)

RNAV (GPS) RWY 4