


VORTAC SPI	APP CRS	Rwy Ldg	7927
112.7	055°	TDZE	592
Chan 74		Apt Elev	598

VOR RWY 4


ABRAHAM LINCOLN CAPITAL (SPI)

DME required.	MALSR	MISSED APPROACH: Climb to 1500 then climbing left turn to 2500 on heading 325° and on SPI VORTAC R-355 to GROWL/14.7 DME and hold.
▼ VDP NA when using AAA altimeter setting. When local altimeter setting not received, use AAA altimeter setting; increase all MDAs 60 feet and Circling Cat C/D visibility ¼ SM. For inop ALS, increase S-4 Cat C/D visibility to RVR 5500. ▲		

ATIS	SAINT LOUIS APP CON	SPRINGFIELD TOWER ★	GND CON	UNICOM
127.65 270.1	126.15 323.0	121.3 (CTAF) 0 257.8	121.9 348.6	122.95

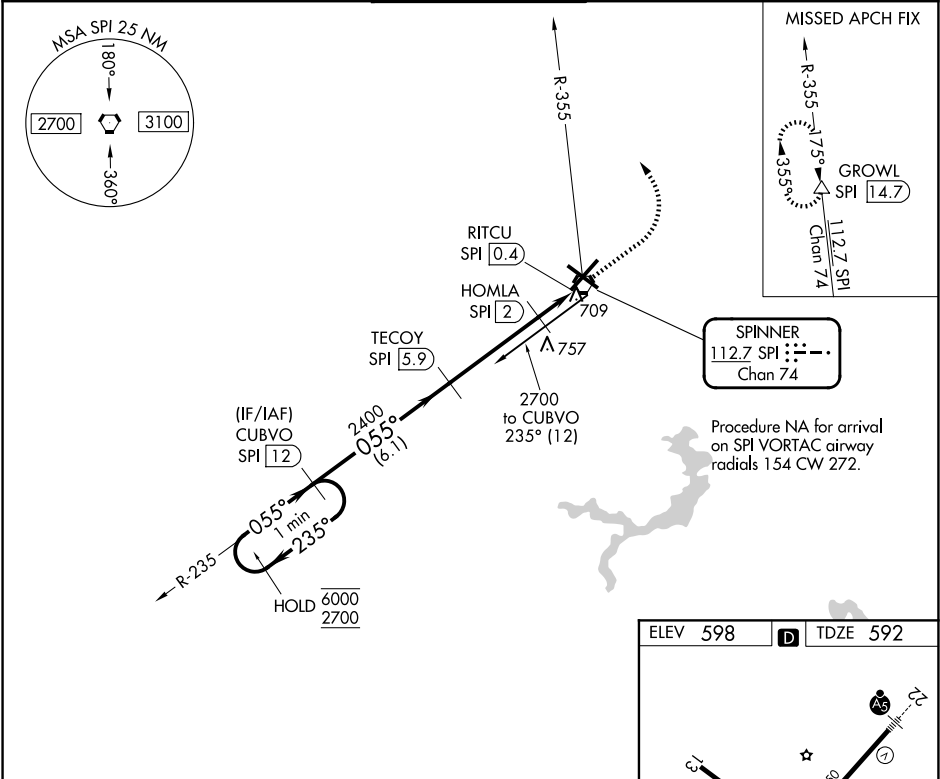

One Minute Holding Pattern	CUBVO SPI 12		TECOY SPI 5.9		1500	2500	SPI R-355	GROWL
	6000 ← 235°	2700 → 055°	2400	1140	hdg 325°	3.00 TCH 56	HOMLA SPI 2	
CATEGORY	A	B	C	D				
S-4	960/24	368 (400-½)	960/40	368 (400-¾)				
CIRCLING	1040-1 442 (500-1)	1100-1 502 (600-1)	1360-2¼ 762 (800-2¼)	1380-2½ 782 (800-2½)				

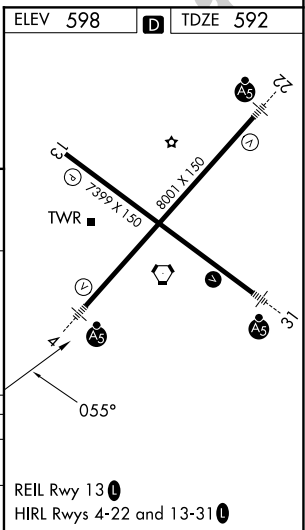

EC-3, 01 OCT 2026 to 29 OCT 2026

EC-3, 01 OCT 2026 to 29 OCT 2026