

LOC/DME I-HTS 109.9 Chan 36	APP CRS 118°	Rwy Ldg TDZE Apt Elev 6516 828 828	ILS or LOC RWY 12 TRI-STATE/MILTON J FERGUSON FLD (HTS)
--	------------------------	--	--


DME required. RADAR required for procedure entry.

For inop ALS, increase S-LOC 12 Cats C and D visibility to RVR 5500.
*RVR 1800 authorized with use of FD or AP or HUD to DA.

MALS

MISSED APPROACH: Climb to 2800 then climbing left turn to 4000 on heading 005° and HVQ VOR/DME R-284 to MILK/HVQ VOR/DME 34 DME and hold, continue to climb-in-hold to 4000.

ATIS 125.2	HUNTINGTON APP CON 119.75 270.1	HUNTINGTON TOWER 118.5 270.1	GND CON 121.9
----------------------	---	--	-------------------------

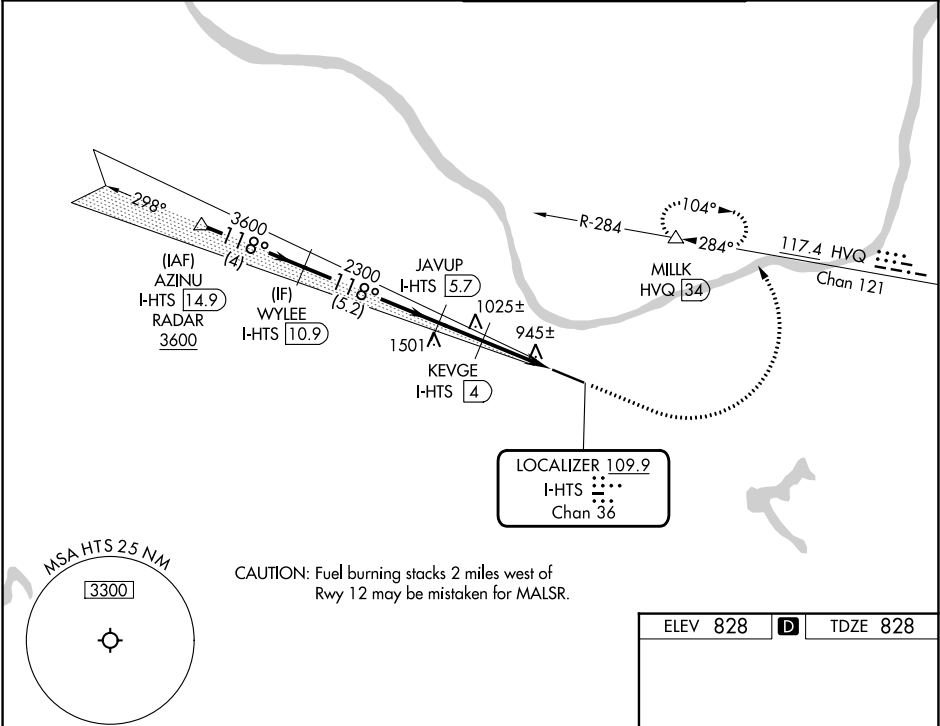

AZINU
I-HTS 14.9
RADAR

WYLEE
I-HTS 10.9

JAVUP
I-HTS 5.7

KEVGE
I-HTS 4

2800

4000

hdg 005°

HVQ R-284

MILK

3600

2300

1760

118°

GS 3.00°

TCH 56

4 NM

5.2 NM

1.7 NM

1.8 NM

1 NM

3600

2300

1760

118°

GS 3.00°

TCH 56

4 NM

5.2 NM

1.7 NM

1.8 NM

1 NM

CATEGORY	A	B	C	D
S-ILS 12*	1028/24 200 (200-½)			
S-LOC 12	1200/24	372 (400-½)	1200/35	372 (400-⅝)
CIRCLING	1300-1 472 (500-1)	1380-1 552 (600-1)	1520-2 692 (700-2)	1740-3 912 (1000-2)

ELEV 828

D

TDZE 828

118°

7017 X 150

TWR