

CAMP SPRINGS, MARYLAND


ILS or LOC RWY 1R

|                           |                         |                                                                         |
|---------------------------|-------------------------|-------------------------------------------------------------------------|
| LOC I-VJM<br><b>110.5</b> | APCH CRS<br><b>010°</b> | Rwy Idg<br>TDZE<br>Arpt Elev<br><b>9756</b><br><b>265</b><br><b>280</b> |
|---------------------------|-------------------------|-------------------------------------------------------------------------|

(USAF) JOINT BASE ANDREWS (ANDREWS AFB) (KADW)

|                                                                                                                                                                                                                                                                   |             |                                                                                                 |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------------------------------------------------------------------------------------------------|
| RADAR required<br>RADAR or DME required at FAF                                                                                                                                                                                                                    | ALSIF-1<br> | † MISSED APPROACH:<br>Climb to 2500 via ADW<br>VORTAC R-010 to<br>HULVI/ADW 13 DME<br>and hold. |
| * When ALS inop, increase RVR to 40, vis to 3/4 mile. RVR 18 authorized with use of Flight Director System or Autopilot System or Heads-Up-Display to DA.<br>** When ALS inop, increase RVR to 55, vis to 1 mile.<br>*** Circling not authorized W of Rwy 1L-19R. |             |                                                                                                 |

|                               |                                       |                             |                               |
|-------------------------------|---------------------------------------|-----------------------------|-------------------------------|
| ATIS<br><b>133.675 251.05</b> | POTOMAC APP CON<br><b>128.0 335.5</b> | TOWER<br><b>118.4 349.0</b> | GND CON<br><b>121.8 275.8</b> |
|-------------------------------|---------------------------------------|-----------------------------|-------------------------------|

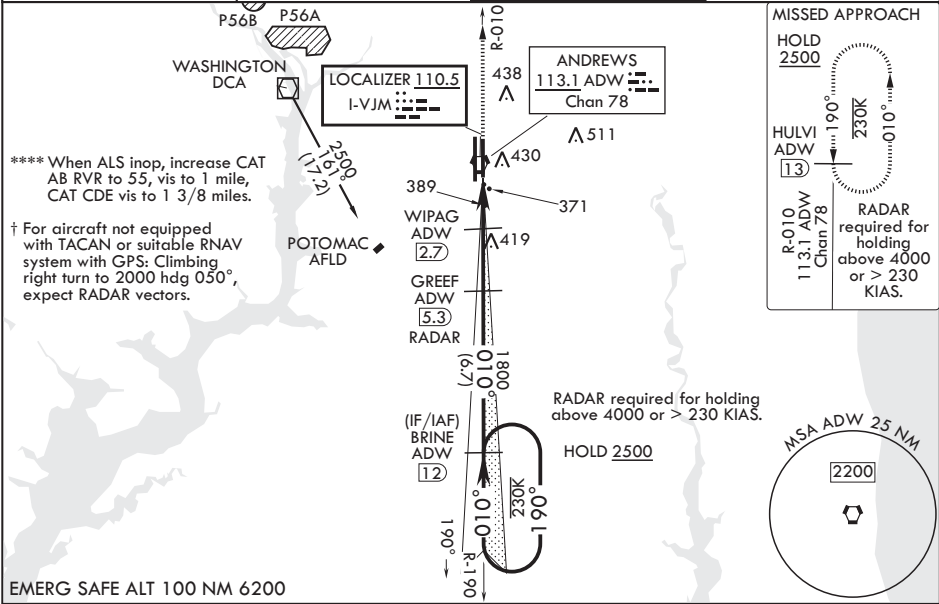

|                                  |                    |   |                     |         |                   |  |             |  |
|----------------------------------|--------------------|---|---------------------|---------|-------------------|--|-------------|--|
| EMERG SAFE ALT 100 NM 6200       |                    |   |                     |         | ELEV 280          |  | TDZE 265    |  |
|                                  |                    |   |                     |         | HULVI ADW 13      |  | VORTAC      |  |
| GS 3.00° TCH 47                  |                    |   |                     |         | WIPAG ADW 2.7     |  | AREKE ADW 6 |  |
| 2500 190° 010°                   |                    |   |                     |         | 1800 010°         |  | 980 010°    |  |
| 2.6 NM                           |                    |   |                     |         | 2.1 NM            |  |             |  |
| CATEGORY                         | A                  | B | C                   | D       | E                 |  |             |  |
| S-ILS 1R*                        | 465/24             |   | 200                 | (200-½) |                   |  |             |  |
| S-LOC 1R**                       | 640/24 375 (400-½) |   | 640/35              |         | 375 (400-¾)       |  |             |  |
| CIRCLING***                      | 780-1 500 (500-1)  |   | 780-1½ 500 (500-1½) |         | 840-2 560 (600-2) |  |             |  |
| NON-DME                          |                    |   |                     |         |                   |  |             |  |
| S-LOC 1R****                     | 720/24 455 (500-½) |   | 720/45              |         | 455 (500-¾)       |  |             |  |
| CIRCLING***                      | 780-1 500 (500-1)  |   | 780-1½ 500 (500-1½) |         | 840-2 560 (600-2) |  |             |  |
| FAF to MAP 4.7 NM                |                    |   |                     |         |                   |  |             |  |
| Knots 60 90 120 150 180          |                    |   |                     |         |                   |  |             |  |
| Min:Sec 4:42 3:08 2:21 1:53 1:34 |                    |   |                     |         |                   |  |             |  |

CAMP SPRINGS, MARYLAND

38°49'N - 76°52'W JOINT BASE ANDREWS (ANDREWS AFB) (KADW)

Amdt 1 18MAY23

ILS or LOC RWY 1R

NE-3, 01 OCT 2026 to 29 OCT 2026

NE-3, 01 OCT 2026 to 29 OCT 2026