

WAAS
CH **56640**
W04A

APP CRS
045°

Rwy Ldg
TDZE **242**
Apt Elev **264**

RNAV (GPS) RWY 4

THOMASVILLE RGNL (TVI)


▼

▲

Rwy 4 helicopter visibility reduction below 1 SM NA. DME/DME RNP-0.3 NA. Straight-in Rwy 4 NA at night, Circling Rwy 4 NA at night. When local altimeter setting not received, use Valdosta altimeter setting: increase all MDAs 100 feet and all Cat C and D visibilities ⅓ SM.

MISSED APPROACH:
Climb to 2500 direct WEVOB and hold.

AWOS-3PT 119.175	VALDOSTA APP CON★ 126.6 285.6	UNICOM 123.075 (CTAF)
----------------------------	---	---------------------------------

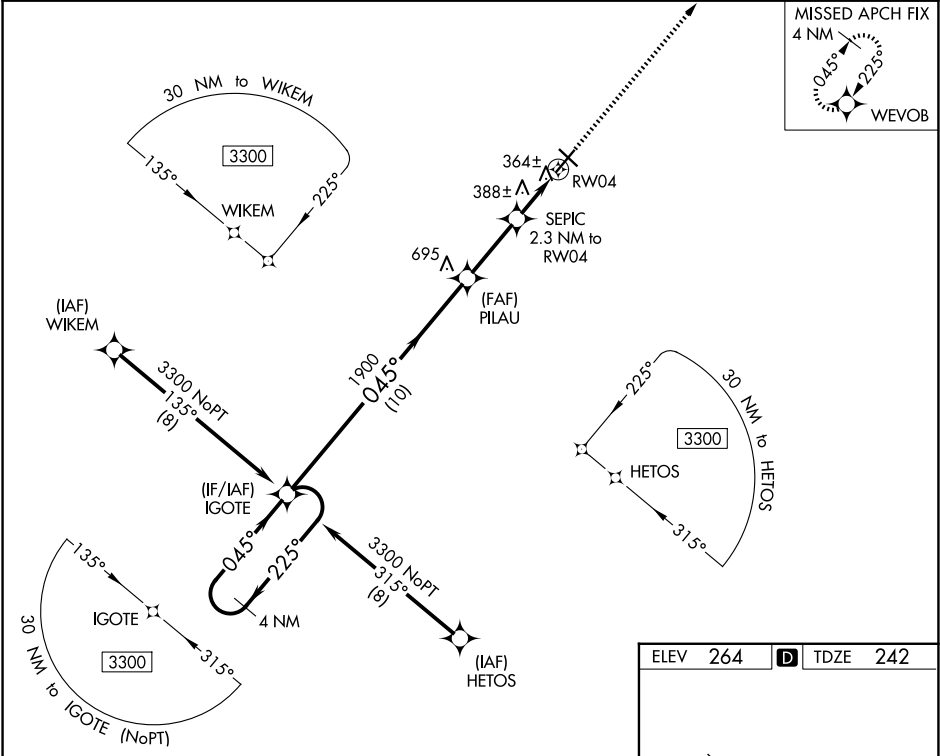

4 NM Holding Pattern

IGOTE

3300 ← 225° / 045° →

045°

PILAU

SEPIC 2.3 NM to RW04

TCH 54

1900

1020

RW04

2500 WEVOB

10 NM

2.8 NM

2.3 NM

CATEGORY	A	B	C	D
LP MDA	620-1 378 (400-1)			
LNAV MDA	640-1 398 (400-1)		640-1⅓ 398 (400-1⅓)	
CIRCLING	700-1 436 (500-1)	800-1 536 (600-1)	900-1¾ 636 (700-1¾)	1040-2½ 776 (800-2½)

ELEV 264 TDZE 242