

HI-TACAN RWY 20

|                                 |                  |                                                      |
|---------------------------------|------------------|------------------------------------------------------|
| VORTAC SGF<br>116.9<br>Chan 116 | APCH CRS<br>196° | Rwy Idg<br>7003<br>TDZE<br>1262<br>Arpt Elev<br>1268 |
|---------------------------------|------------------|------------------------------------------------------|

[USAF]


SPRINGFIELD-BRANSON NATL (KSGF)

**⚠** When local altimeter setting not received, use HFJ altimeter setting.  
Rwy 20 helicopter visibility reduction below ¾ mile NA.

MALS  
**(A4)**

MISSED APPROACH: Climb to 3000 then right turn via SGF VORTAC R-206 to BLUE INT/SGF 21.8 DME and hold.

|                 |                                                                |                      |                         |
|-----------------|----------------------------------------------------------------|----------------------|-------------------------|
| ATIS<br>135.125 | APP CON<br>121.1 290.5 020° - 199°<br>124.95 318.2 200° - 019° | TOWER<br>119.9 257.8 | GND CON<br>121.9 251.15 |
|-----------------|----------------------------------------------------------------|----------------------|-------------------------|

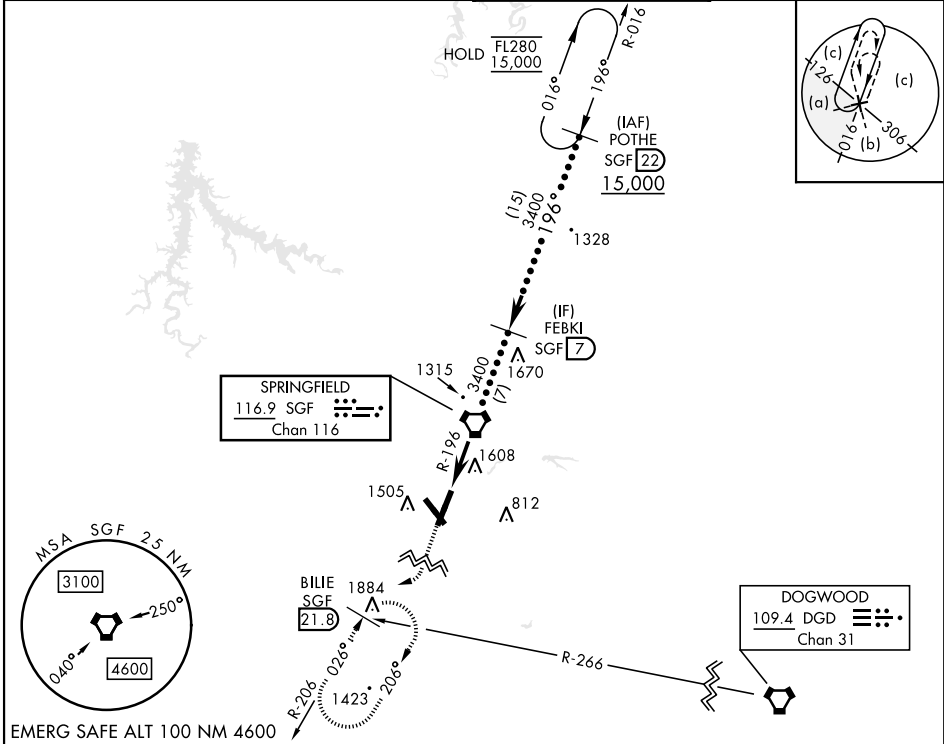

|                                |                         |                         |                         |                                          |  |              |  |
|--------------------------------|-------------------------|-------------------------|-------------------------|------------------------------------------|--|--------------|--|
| 3000                           |                         | BLUE SGF 21.8           |                         | VDP NA when using HFJ altimeter setting. |  | POTHE SGF 22 |  |
| SGF R-206                      |                         | SGF 21.8                |                         | SGF VORTAC                               |  | FEBKI SGF 7  |  |
| SGF 6.5                        |                         | SGF 5.1                 |                         | 3400                                     |  | 3400         |  |
| 6.5 NM                         |                         | 3.02° TCH 47            |                         |                                          |  |              |  |
| CATEGORY                       | C                       | D                       | E                       |                                          |  |              |  |
| S-20                           | 1760-1½<br>498 (500-1½) | 1760-1½<br>498 (500-1½) | 1760-1½<br>498 (500-1½) |                                          |  |              |  |
| CIRCLING                       | 1820-1½<br>552 (600-1½) | 1920-2<br>652 (700-2)   | 2080-3<br>812 (900-3)   |                                          |  |              |  |
| HFJ ALTIMETER SETTING MINIMUMS |                         |                         |                         |                                          |  |              |  |
| S-20                           | 1860-1½<br>598 (600-1½) | 1860-1½<br>598 (600-1½) | 1860-1½<br>598 (600-1½) |                                          |  |              |  |
| CIRCLING                       | 1920-1¾<br>652 (700-1¾) | 2020-2½<br>752 (800-2½) | 2180-3<br>912 (1000-3)  |                                          |  |              |  |

ELEV 1268 **(D)** TDZE 1262

196°

8000 x 150

2003 x 150

TWR

HIRL all rwys  
REIL Rwy 32

HI-TACAN RWY 20

NC-3, 01 OCT 2026 to 29 OCT 2026

NC-3, 01 OCT 2026 to 29 OCT 2026