

APP CRS
197°

Rwy Ldg
TDZE
Apt Elev

6948
-1
4


RNAV (RNP) Z RWY 20
LOUIS ARMSTRONG NEW ORLEANS INTL (MSY)

RNP AR APCH - GPS.
▼ For uncompensated Baro-VNAV systems, procedure NA below -1°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to RVR 6000.

MALS
A4

MISSED APPROACH: Climb to 2000 on track 197° to POLY and track 109° to SAFES and hold.

D-ATIS 127.55	NEW ORLEANS APP CON 125.5 350.35 (W) 133.15 290.3 (E)	NEW ORLEANS TOWER 119.5 254.3	GND CON 121.9 273.525
-------------------------	---	---	---------------------------------

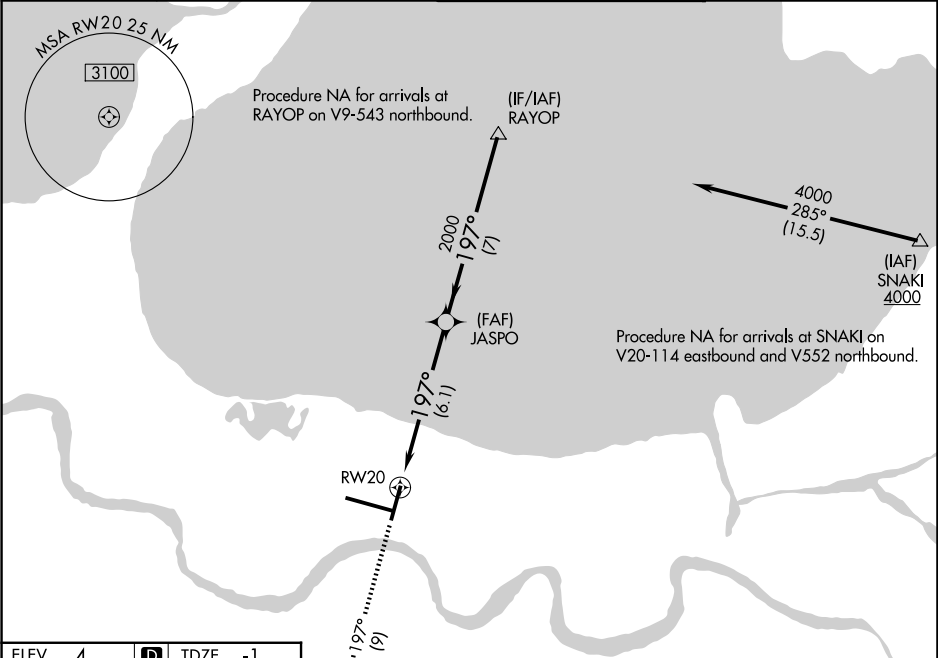

ELEV 4 D TDZE -1

2000

↑ tr 197°

tr 109°

JASPO

2000

197°

4000

RAYOP

GP 3.00°

TCH 52

CATEGORY	A	B	C	D
RNP 0.11 DA		363/40	364 (400-¾)	
RNP 0.30 DA		414/50	415 (500-1)	

AUTHORIZATION REQUIRED