

LOC/DME I-TLK 111.5 Chan 52	APP CRS 134°	Rwy Ldg 9093 TDZE 13 Apt Elev 13
---	------------------------	---



ILS or LOC RWY 13L
JOHN F KENNEDY INTL (JFK)

RNAV 1-GPS or RADAR required for procedure entry.
From COVIR, KMCHI, BUZON: RNAV-1 GPS required.
For inop ALS, increase S-LOC 13L Cat C/D visibility to 1½ SM.

ALSF-2

MISSED APPROACH: Climb to 600 then climbing left turn to 4000 direct DPK VOR/DME and hold.

(SW) 115.4	D-ATIS (NE) 117.7	128.725	NEW YORK APP CON 128.125 269.0	KENNEDY TOWER 119.1 281.55 (4R/22L and 13L/31R) 123.9 281.55 (4L/22R and 13R/31L)	GND CON 121.9 348.6
----------------------	-----------------------------	----------------	--	---	-------------------------------

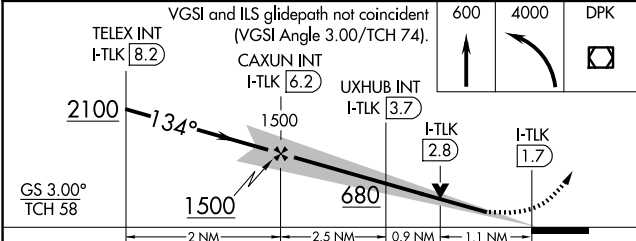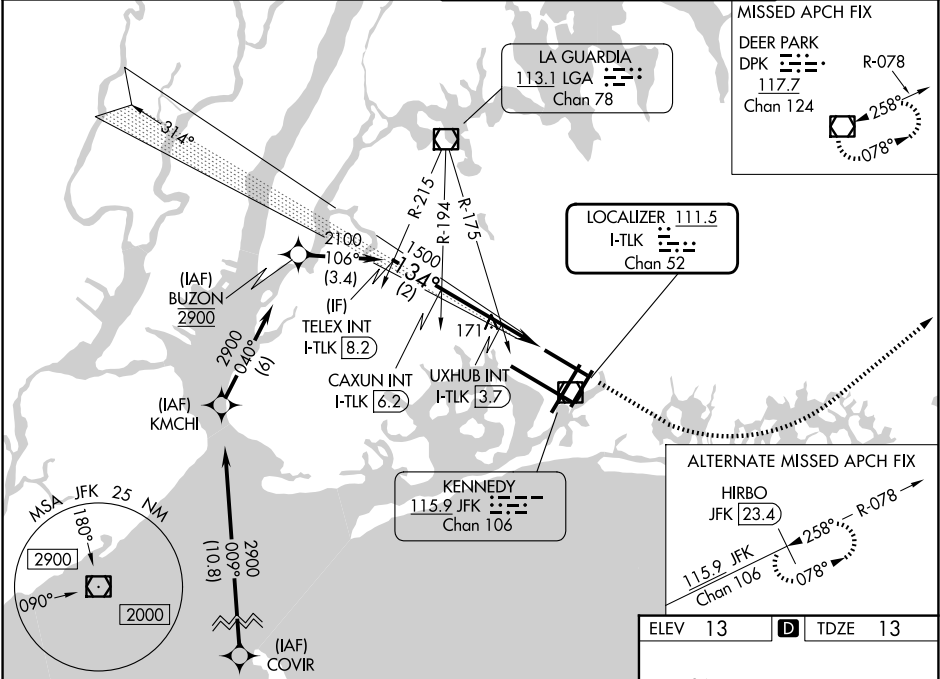

CATEGORY	A	B	C	D
S-ILS 13L	213/18		200 (200-½)	
S-LOC 13L	680/24	667 (700-½)	680-1½	667 (700-1½)
CIRCLING	680-1	667 (700-1)	700-2 687 (700-2)	700-2¼ 687 (700-2¼)
UXHUB FIX MINIMUMS				
S-LOC 13L	440/24	427 (500-½)	440/40	427 (500-¾)
CIRCLING	640-1	627 (700-1)	700-2 687 (700-2)	700-2¼ 687 (700-2¼)

ELEV 13 D TDZE 13

RLS Rwy 13L and 13R
HIRL all Rwy
TDZ/CL Rwy 4L, 4R, 13L, 22L and 31R
FAF to MAP 4.5 NM

Knots	60	90	120	150	180
Min:Sec	4:30	3:00	2:15	1:48	1:30

NE-2, 01 OCT 2026 to 29 OCT 2026

NE-2, 01 OCT 2026 to 29 OCT 2026