

LOC I-AG <u>110.1</u>	APP CRS 280°	Rwy Ldg 9129 TDZE 588 Apt Elev 592
---------------------------------	------------------------	---

ILS Y or LOC Y RWY 28
NIAGARA FALLS INTL (IAG)

ADF required.

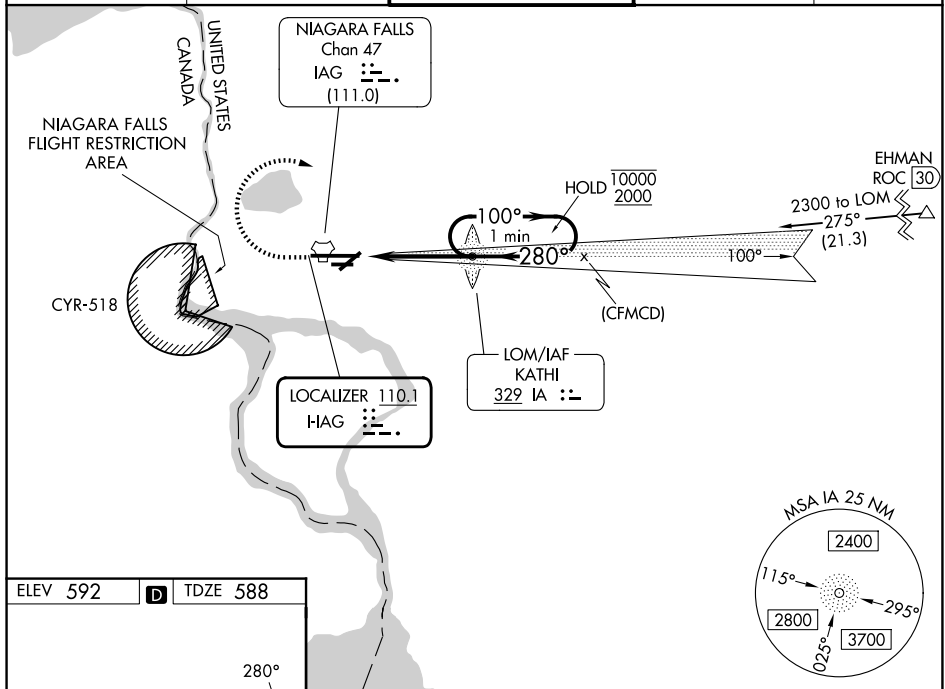
- T** Rwy 28 helicopter visibility reduction below RVR 4000 NA.
A Circling Rwy 6 NA at night.
 Circling NA for Cat E southeast of Rwy 6-24.
 Inop table does not apply to S-ILS 28 all Cats.
 For inop ALS, increase S-LOC 28 visibility Cats A/B to RVR 5500, Cats C/D/E to 1½ SM.

MALSR



MISSED APPROACH:
Climb to 1500 then
climbing right turn to
3200 direct KATHI
LOM and hold, continue
climb-in-hold to 3200.

ATIS 120.8 269.4	BUFFALO APP CON 126.5 317.6	NIAGARA TOWER ★ 118.5 (CTAF) 0 349.0	GND CON 125.3 275.8	UNICOM 122.95
---------------------	--------------------------------	---	------------------------	------------------

[illegible]

NIAGARA FALLS, NEW YORK
Orig-A 19MAR26

43°06'N-78°57'W

NIAGARA FALLS INTL (IAG)

ILS Y or LOC Y RWY 28