


WAAS CH 90132 W06A	APP CRS 060°	Rwy Ldg TDZE 586 Apt Elev 592
--	------------------------	---

RNAV (GPS) RWY 6
NIAGARA FALLS INTL (IAG)

RNP APCH - GPS.		MISSED APPROACH: Climb to 3600 direct ZUPUV and hold, continue climb-in-hold to 3600.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. ▲ Rwy 6 helicopter visibility reduction below 1 SM NA. Rwy 6 Straight-in and Circling minimums NA at night.		

ATIS 120.8 269.4	BUFFALO APP CON 126.5 317.6	NIAGARA TOWER ★ 118.5 (CTAF) 0 349.0	GND CON 125.3 275.8	UNICOM 122.95
----------------------------	---------------------------------------	--	-------------------------------	-------------------------

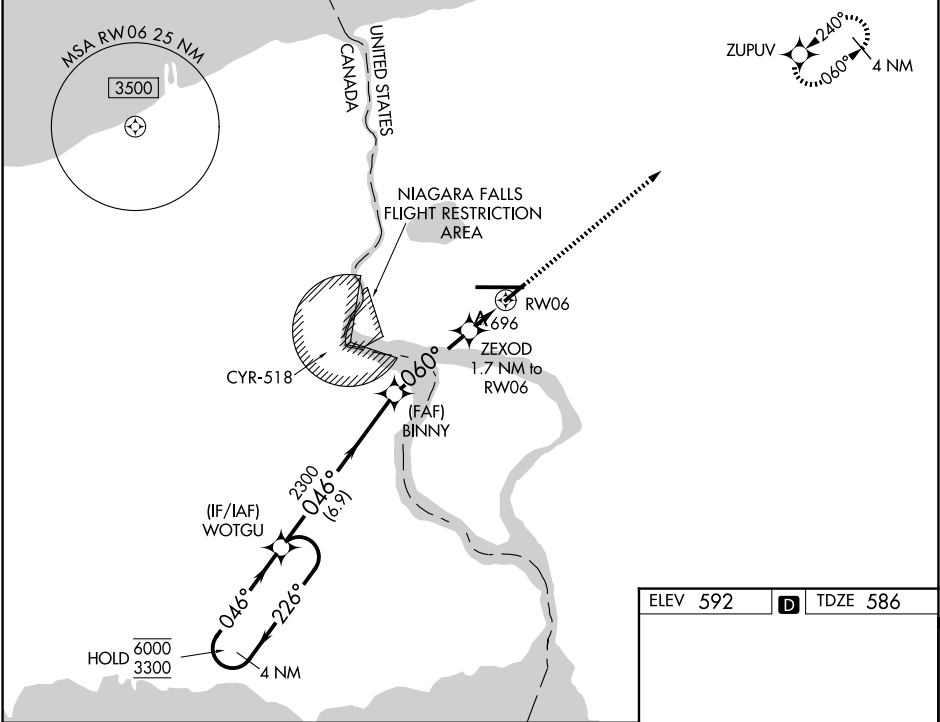

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 45).		3600	ZUPUV
WOTGU		BINNY		ZEXOD	
6000 ← 226°		2300		1.7 NM to RWY 6	
3300 → 046°		046°		RWY 6	
GP 3.00°		2300		1180	
TCH 55		6.9 NM		3.5 NM	
				1.7 NM	
CATEGORY	A	B	C	D	
LPV DA		864-1	278 (300-1)		
LNAV/VNAV DA		849-1	263 (300-1)		
LNAV MDA	1000-1	414 (500-1)	1000-1½	414 (500-1½)	
CIRCLING	1100-1	508 (600-1)	1280-2	1280-2¼	688 (700-2¼)